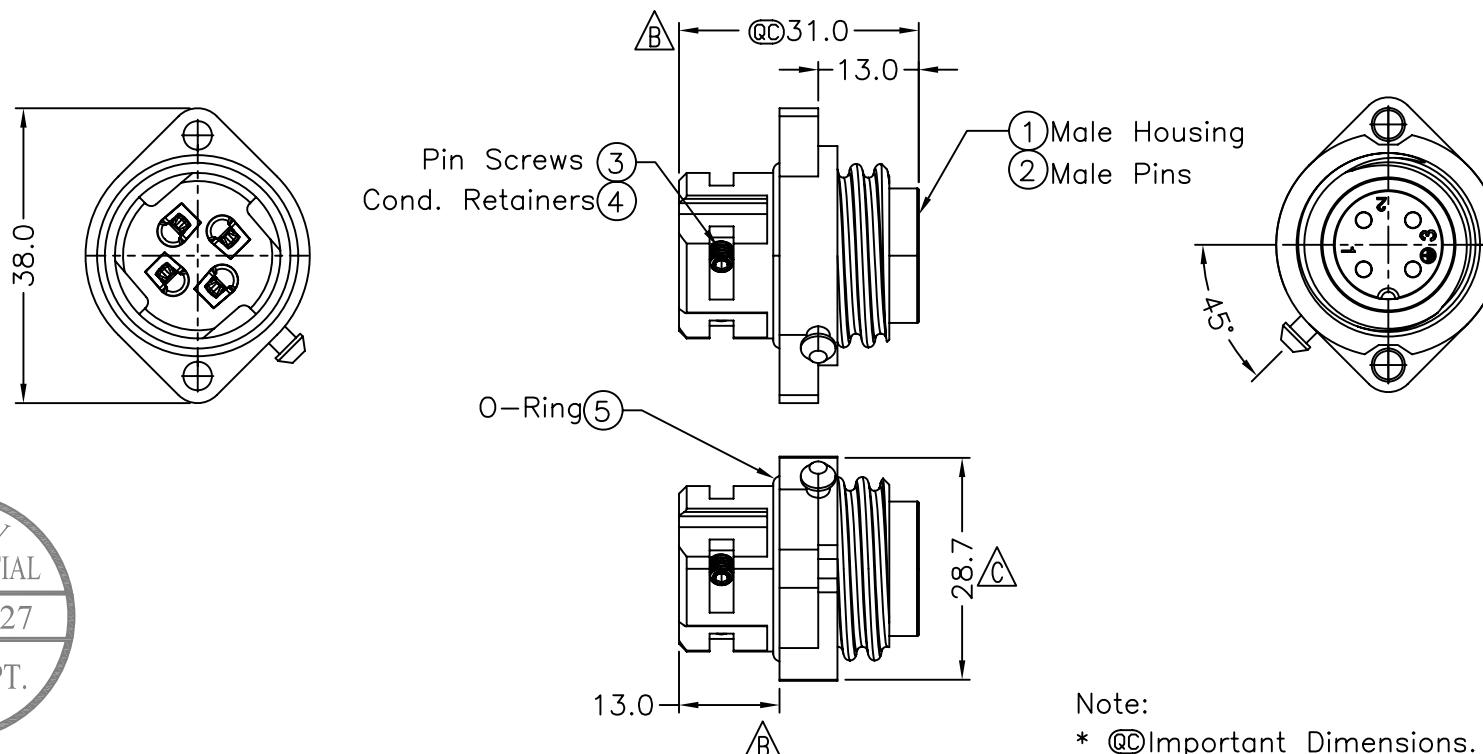
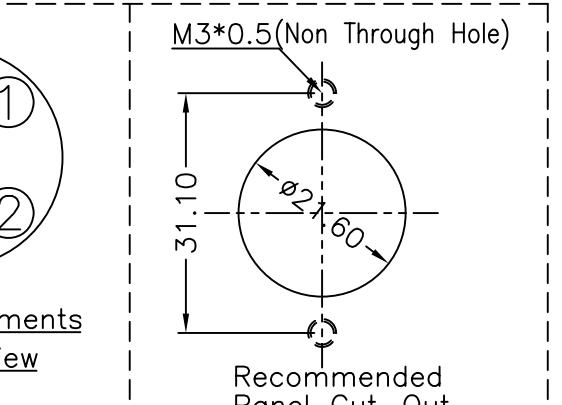



1	2	3	4	5	6	7	8	
				REV B C D	ECN NO. LEN-050326 LEN1130368 LEN1180147	DATE 2010/05/18 2011/03/11 2011/08/27	SIGN Kevin Wang Kevin Wang baowei	DESCRIPTION Modify The Dimensions Modify The Dimensions Add Wire Size
THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.								
				<p>Note:</p> <ul style="list-style-type: none"> * @Important Dimensions. * Waterproof Rate: IP67 * Male Housing: Nylon+GF, Black * Male Pin: Copper Alloy, Tin Plated * Pin Screws: 1.5mm(HEX), Stainless Steel, For wire assembly, tightened by tool. * Cond. Retainer: Copper Alloy, Tin Plated * O-ring: Silicone, Gray * Flame Class: UL94V-0 ⑥* One Set Assembled in one PE Bag * 1.5mm Hex Tool for Screws sold separately △* Wire Size Range: 14AWG~18AWG 				
UNIT:mm 	TITLE Panel Male Power Conn. 16Amp Screw in Type Pin (Tin Plated)			ITEM NO LTPWG-04PMMB-SC7003		DRAWN BY baowei		
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°	SCALE Free			DWG NO LTPWG-04PMMB-SC7003		DATE 2011/08/27		
REV. D SIZE A4 QC :Inspection Item				CUSTOMER		CHECKED BY Micky		
						APPROVED BY Victor		
1 2 3 4 5 6 7 8 FMW10702-01-01A2								