
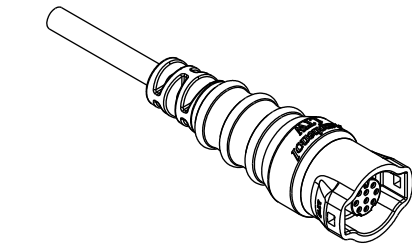
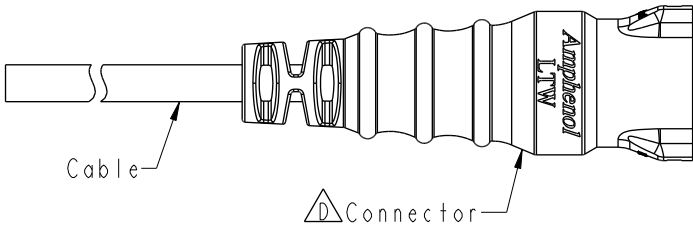
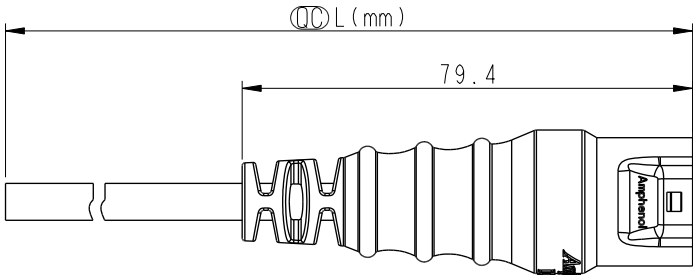
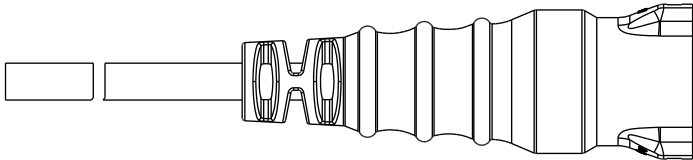


F	1		2		3		4		5		6		7		8			
									REV.		ECN NO.		DATE		SIGN		DESCRIPTION	
									C		LEN15B0346~350		2015/11/07		Joyy		Add 7-8 And 9 Pin To The Common Drawing	
									D		C230222		2023/02/20		Ruru		△D X7	
E									E		C241281		2024/11/07		Ruru		△E X1	
D																		
C																		
B																		
A																		

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LEN15B0346~350	2015/11/07	Joyy	Add 7-8 And 9 Pin To The Common Drawing
D	C230222	2023/02/20	Ruru	△D X7
E	C241281	2024/11/07	Ruru	△E X1

</


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LEN15B0346~350	2015/11/07	Joyy	Add 7-8 And 9 Pin To The Common Drawing
D	C230222	2023/02/20	Ruru	△D X7
E	C241281	2024/11/07	Ruru	△E X1



△D
CD-XXAFFM-RL7AXX

XX: No. Of Pin
 XX: 01~99Meters
 01: 01Meter
 02: 02Meters
 :
 99: 99Meters







Note: △D
 * RoHS Compliant
 * ∅ Important dimension
 * Waterproof rate: IP67, mated
 * Connector
 △C Housing: Thermoplastic, Black
 Pin: Copper Alloy, Gold Plated
 O-Ring: Rubber, Gray
 Outer mold: Thermoplastic, Black
 * Cable: UL2464, PVC Jacket, Black
 * Cable length tolerance: IM: +50/-0 mm
 1M < L ≤ 3M: +100/-0 mm
 3M < L ≤ 5M: +150/-0 mm
 5M < L ≤ 10M: ±100 mm
 10M < L ≤ 20M: ±200 mm
 20M < L ≤ 30M: ±300 mm
 30M < L ≤ 99M: ±500 mm
 * Prohibiting the use of place in oils

UNIT:mm			TITLE RBL, C-5A, CABLE W/SR F, F, MOLDING, RBL 			
TOLERANCE ±0.5			SCALE 3:4	SIZE A4	SHEET 1	OF 2
			REV. E	WC-REV. A.3	QC: Inspection item	

ITEM NO		DRAWN BY Ruru		DATE 2024-11-05	
DWG NO CD-XXAFFM-RL7AXX		CHECKED BY Rita		DATE 2024-11-05	
CUSTOMER ALTW		APPROVED BY Fred		DATE 2024-11-05	

Amphenol LTW
 安費諾亮泰企業股份有限公司

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

F	B																															
E	B C D		9P		7.4	20	CD-09AFFM-RL7AXX		9		White	白	9	--																		
			8P		6.8		CD-08AFFM-RL7AXX		8		Purple	紫	8	Purple	紫																	
			7P		6.5		CD-07AFFM-RL7AXX		7		Red	紅	7	Red	紅																	
			6P		6.5		CD-06AFFM-RL7AXX		6		Green	綠	6	Green	綠																	
			5P		6.0		CD-05AFFM-RL7AXX		5		Yellow	黃	5	Yellow	黃																	
			4P		5.5		CD-04AFFM-RL7AXX		4		Blue	藍	4	Blue	藍																	
			3P		5.5		CD-03AFFM-RL7AXX		3		Orange	橘	3	Orange	橘																	
			2P		5.5		CD-02AFFM-RL7AXX		2		Brown	棕	2	Brown	棕																	
			Contacts		Cable OD	AWG	Part No.		1		Black	黑	1		Black	黑																
D	C																															
C	Pin Out		4		--	4		Blue	藍	4		Blue	藍	6		Green	綠	6		Grey	灰	9		--								
	3		White	白	3		White	白	3		White	白	5		--	5		Yellow	黃	5		Yellow	黃	8		--						
	2		--	2		--	2		Brown	棕	2		Brown	棕	4		Black	黑	4		Green	綠	4		Green	綠						
	1		Black	黑	1		Black	黑	1		Black	黑	3		Blue	藍	3		White	白	3		White	白	3		Orange	橘				
													2		White	白	2		Blue	藍	2		Blue	藍	2		Brown	棕				
													1		Brown	棕	1		Brown	棕	1		Brown	棕	1		Black	黑				
B	Pin Assignments Front View				2Pin				3Pin				4Pin				5Pin		E 		6Pin				7Pin							
A	UNIT:mm						TITLE		RBL, C-5A, CABLE W/SR		D		ITEM NO		DRAWN BY		DATE															
	TOLERANCE						SCALE		3:4				SIZE		A4		SHEET		2 OF 2		DWC NO		CD-XXAFFM-RL7AXX		CHECKED BY		Rita		DATE		2024-11-05	
	±0.5						REV.		E				WC-REV.		A.3		QC:Inspection item		CUSTOMER		ALTW		APPROVED BY		Fred		DATE		2024-11-05			