

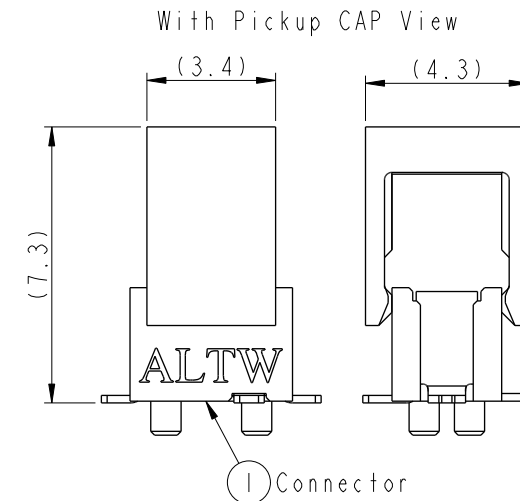
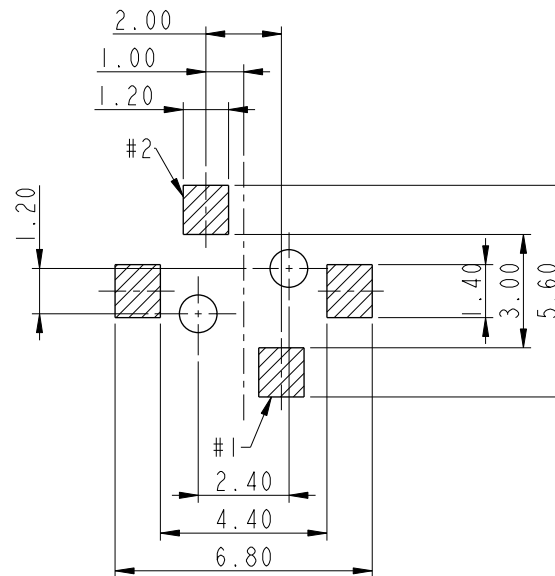
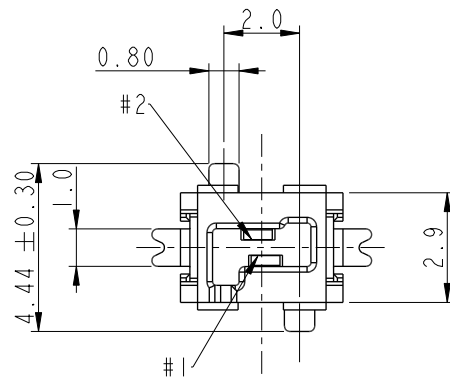


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
D	C192063	2019-12-02	NianPing Yu	 X1
E	C220940	2022-06-20	Ruru	 X3

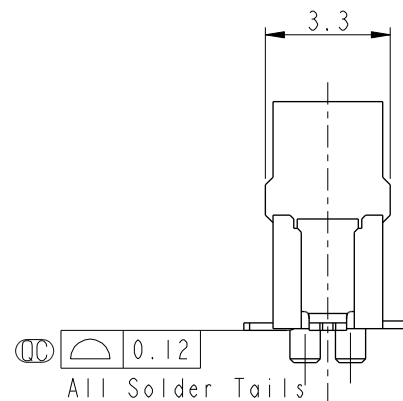

RECOMMENDED P.C.B. LAYOUT
GENERAL TOLERANCE IS ± 0.05

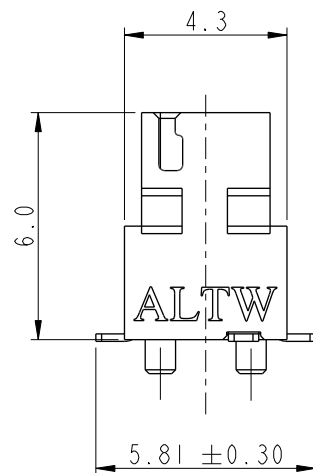


Notes:

- *  Important Dimension To Check.
- * Housing: High temperature thermoplastic.
UL94V-0, color is Natural white.
- * Pickup Cap: High temperature thermoplastic.
UL94V-0, color is Black.
- * Terminal: Copper Alloy,Gold Plated on contact
area.Tin plated on solder tails.
- * Solder Peg: Copper Alloy,Tin plated over Nickel.

UNIT:mm		 		TITLE SSL, 1.1 NON WP, F, 2P SMT S W/POST, NONE 			Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO SSL11-J2A00-000001		DRAWN BY NianPing Yu		DATE 2019-08-27		
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°		SCALE 5:1		SIZE A4		SHEET 1 OF 2			DWG NO SSL11-J2A00-000001		CHECKED BY Fisher Wang		DATE 2019-08-27		
		REV. E		WC-REV. A.15		QC: Inspection item			CUSTOMER ALTW		APPROVED BY Max Yang		DATE 2019-08-27		

Pull Out Direction

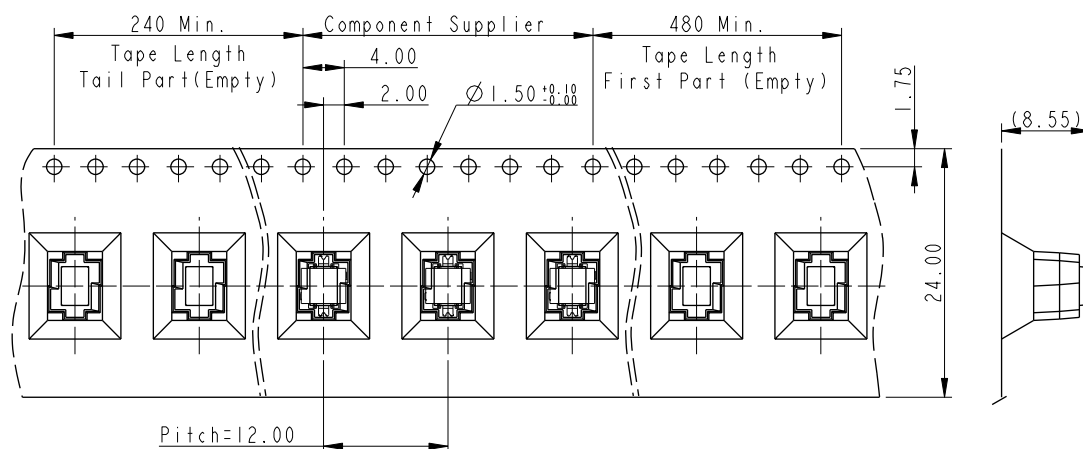


MATERIALS


1. Carrier Tape: Polystyren (PS)
2. Cover Tape: Polystyren (PS)
3. Reel: Polystyren (PS)

QUANTITY




1. 500Pcs Per Reel
2. 8 Reel Per Carton (4000Pcs/Carton)
3. Reference Standard: EIA-481-D
4. Net Weight: 0.5Kg/Carton.
5. Gross Weight: 4.0Kg/Carton.

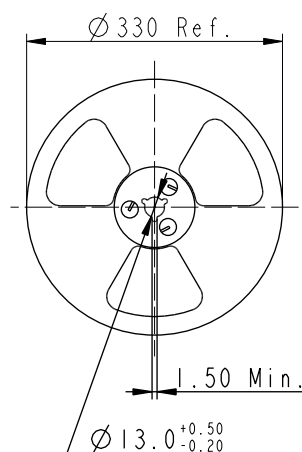

Reel For Carrier Tape

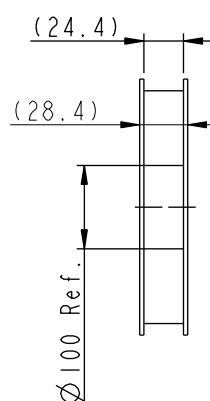

Pull Out Direction

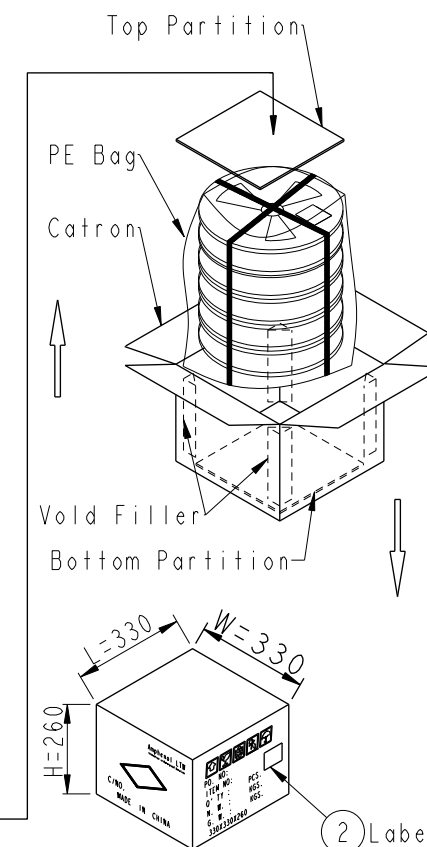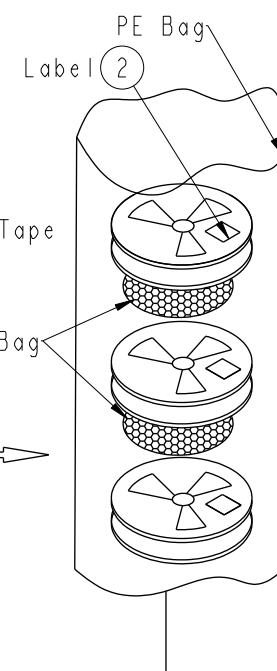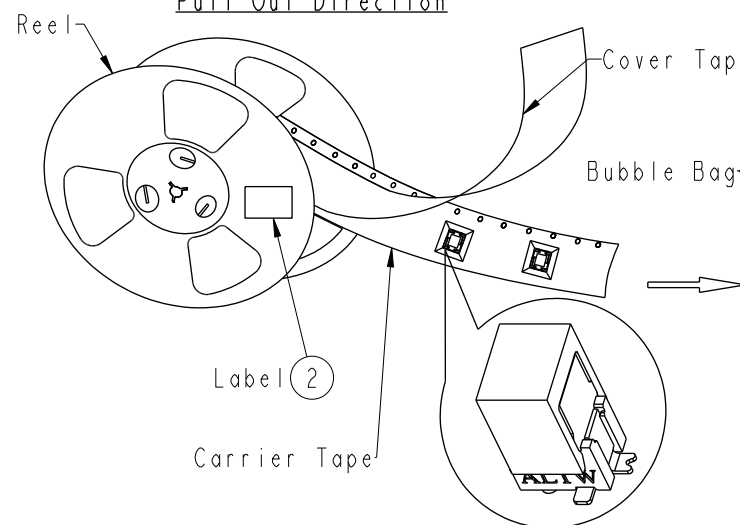

UNIT:mm	
TOLERANCE	
.X	±0.25
.XX	±0.1
.XXX	±0.05
ANGLES	±1°

TITLE SSL, 1.1 NON WP, F, 2P SMT S W/POST, NONE			
SCALE 5:1	SIZE A4	SHEET 2 OF 2	
REV. E	WC-REV. A.8	QC: Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO SSL11-J2A00-000001	DRAWN BY NianPing Yu	DATE 2019-08-27
DWG NO SSL11-J2A00-000001	CHECKED BY Fisher Wang	DATE 2019-08-27
CUSTOMER ALTW	APPROVED BY Max Yang	DATE 2019-08-27