
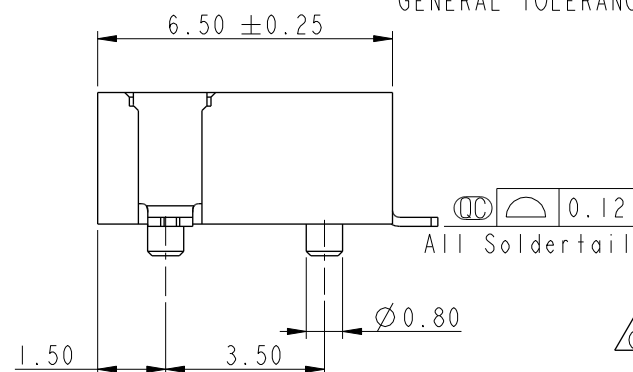
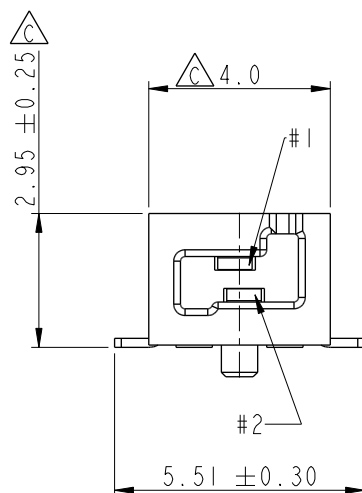
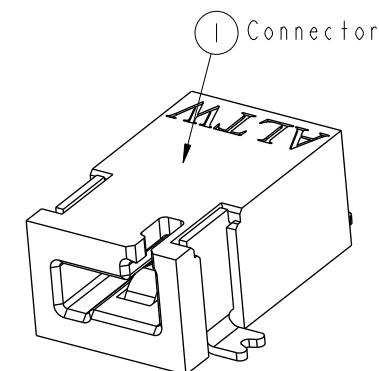
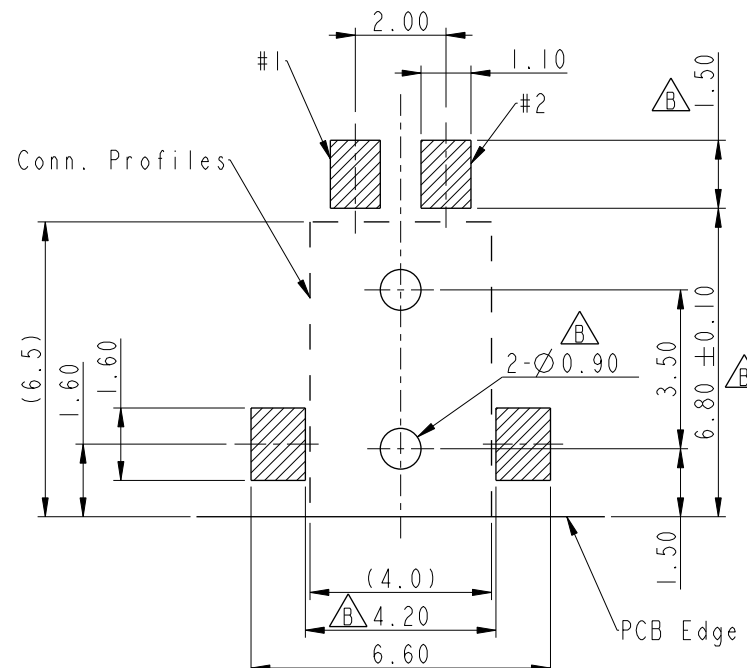


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
D	C191496	2019-08-29	NianPing Yu	Add UL Label
E	C192063	2019-12-02	NianPing Yu	△ XI
F	C220940	2022-06-20	Ruru	△ X3

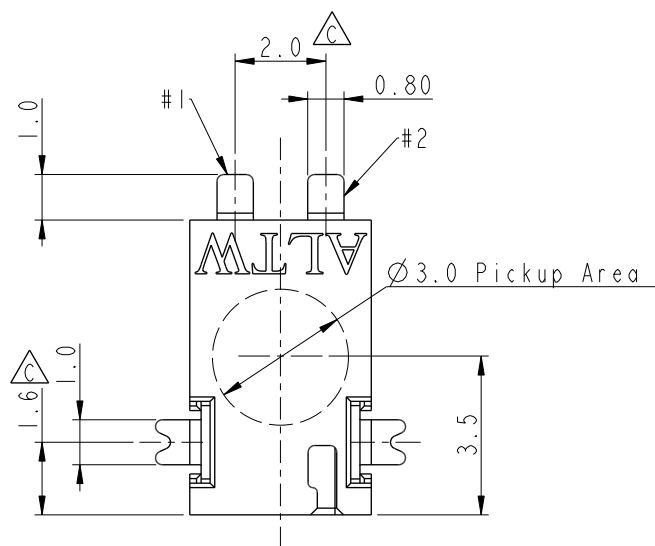


Notes:

- * Ⓞ Important Dimension To Check.
- * Housing: High temperature thermoplastic. UL94V-0, color is Natural white.
- * Terminal: Copper Alloy, Gold Plated on contact area. Tin plated on solder tails.
- * Solder Peg: Copper Alloy, Tin plated over Nickel.



UNIT: mm		TITLE
TOLERANCE		SSL, 1.1 NON WP, F, 2P SMT R/A W/POST, NONE △
.X	± 0.25	SCALE
.XX	± 0.1	6:1
.XXX	± 0.05	SIZE
ANGLES	$\pm 1^\circ$	A4
		SHEET
		1 OF 2
		REV.
		F
		WC-REV.
		A.2
		QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司






ITEM NO	SSL11-J2C00-000001	DRAWN BY	NianPing Yu	DATE	2019-08-29
DWG NO	SSL11-J2C00-000001	CHECKED BY	Fisher Wang	DATE	2019-08-29
CUSTOMER	ALTW	APPROVED BY	Max Yang	DATE	2019-08-29



Pull Out Direction

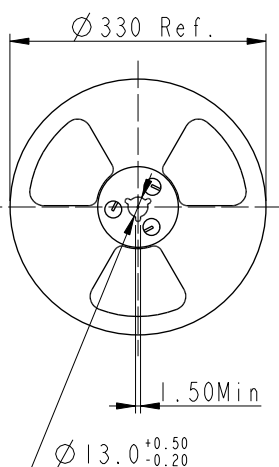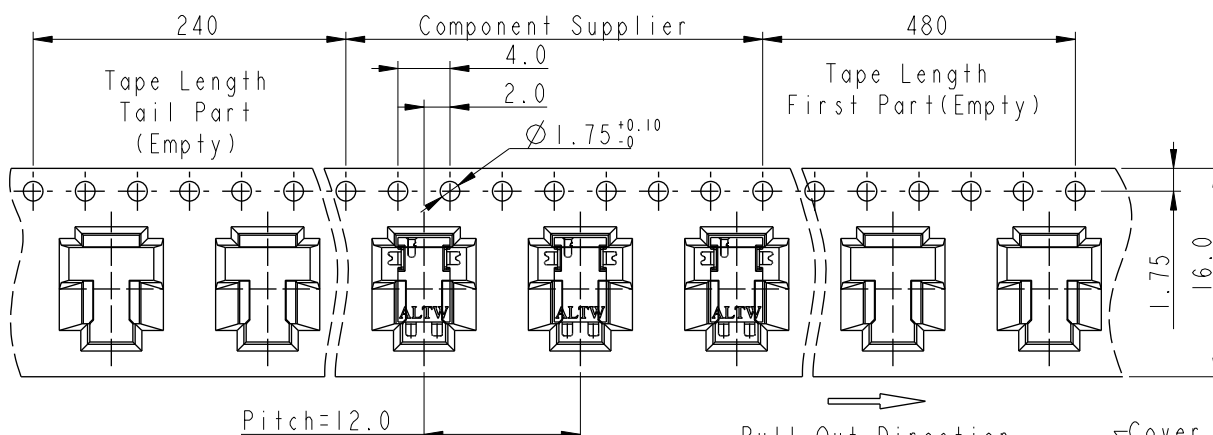

Reel For Carrier Tape

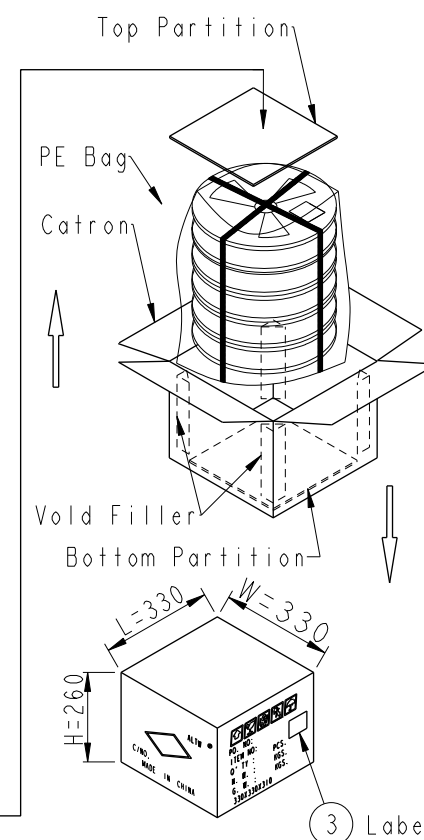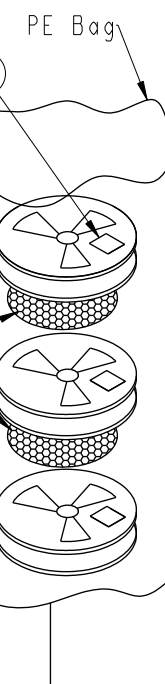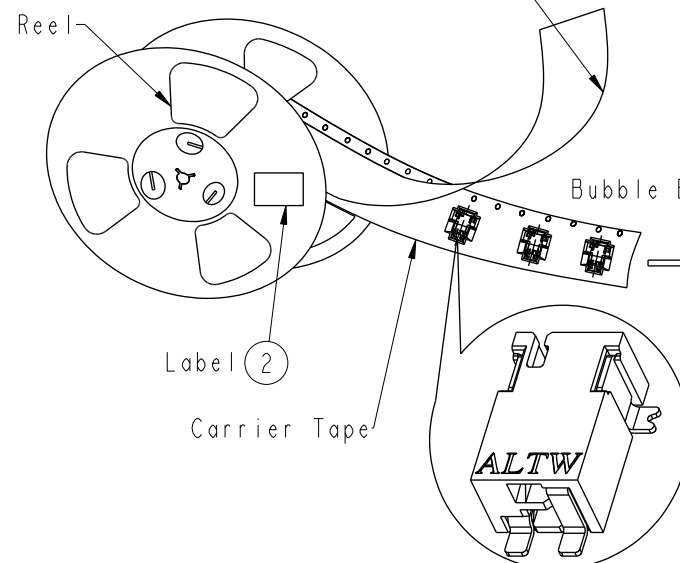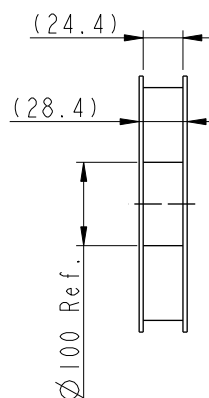


MATERIALS

1. Carrier Tape: Polystyren (PS)
2. Cover Tape: Polystyren (PS)
3. Reel: Polystyren (PS)

QUANTITY

1. 1200Pcs Per Reel
2. 8 Reel Per Carton (9600Pcs/Carton)
3. Reference Standard: EIA-481-D
4. Net Weight: 1.2Kg/Carton.
5. Gross Weight: 6.0Kg/Carton.

UNIT:mm



TOLERANCE
.X ± 0.25
.XX ± 0.1
.XXX ± 0.05
ANGLES $\pm 1^\circ$

TITLE

SSL, 1.1 NON WP, F, 2P
SMT R/A W/POST, NONE

SCALE

5:1

SIZE

A4

SHEET

2

OF

2

REV.

F

WC-REV.

A.8

QC

Inspection item

Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO

SSL11-J2C00-000001

DWG NO

SSL11-J2C00-000001

CUSTOMER

ALTW

DRAWN BY

NianPing Yu

CHECKED BY

Fisher Wang

APPROVED BY

Max Yang

DATE

2019-08-29

DATE

2019-08-29

DATE

2019-08-29