
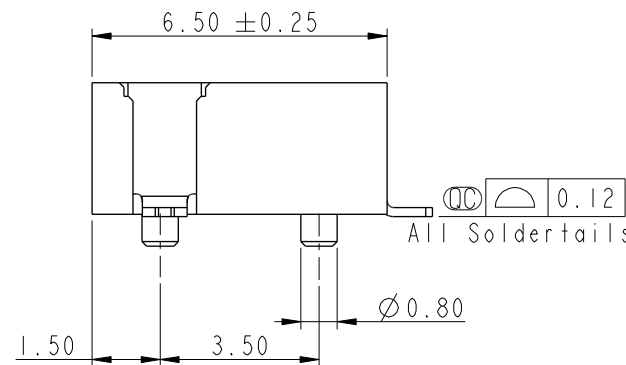
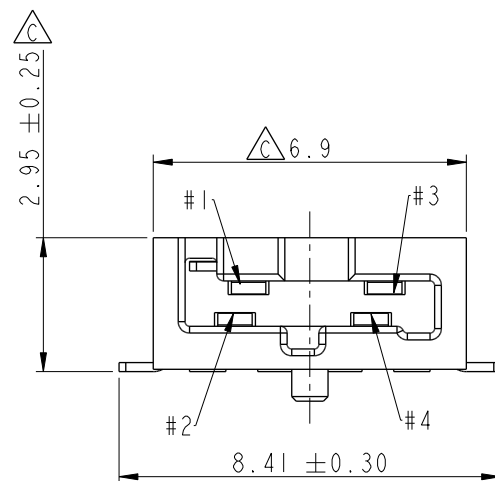
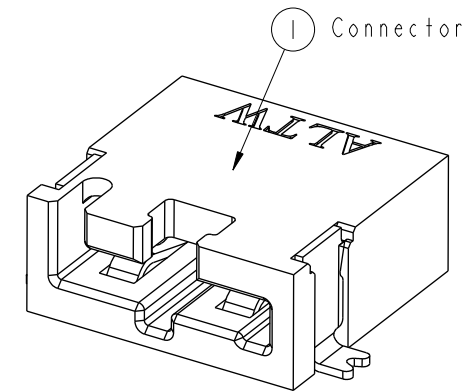
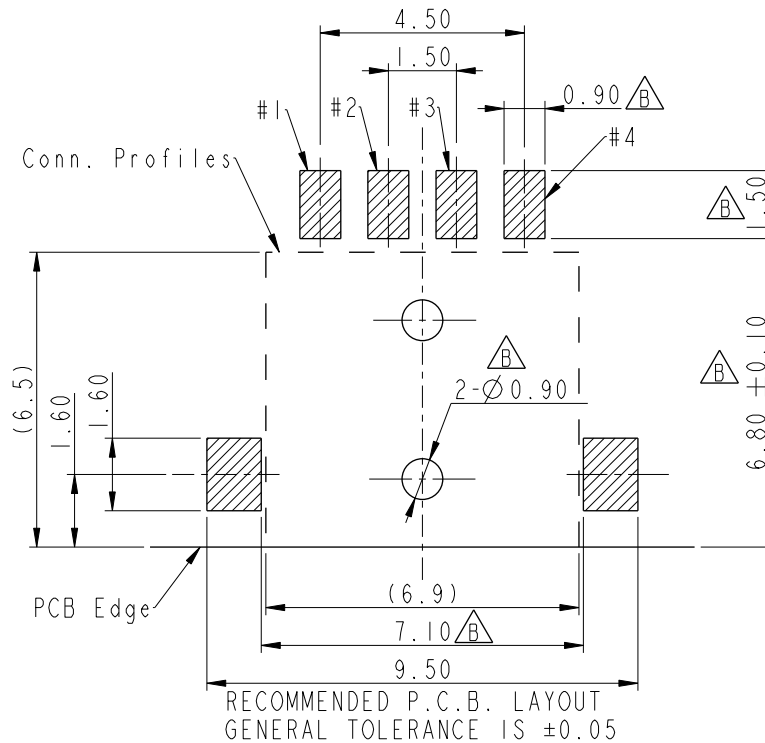


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
D	C191205	2019-07-29	NianPing Yu	Add UL label
E	C192063	2019-12-03	NianPing Yu	 X1
F	C220940	2022-06-20	Ruru	 X3

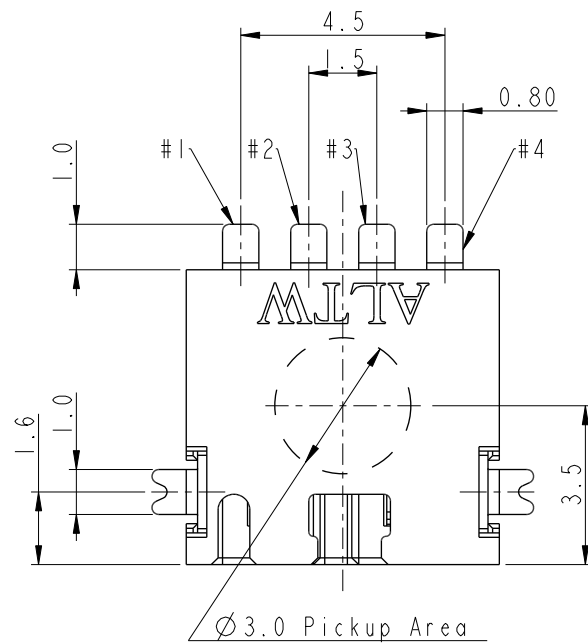

Notes:

- *  Important Dimension To Check.
- * Housing: High temperature thermoplastic.
UL94V-0, color is Natural white.
-  * Terminal: Copper Alloy, Gold Plated on contact area. Tin plated on solder tails.
- * Solder Peg: Copper Alloy, Tin plated over Nickel.

UNIT:mm						TITLE SSL, 1.1 NON WP, F, 4P SMT R/A W/POST, NONE		Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO SSL11-J4C00-000001		DRAWN BY NianPing Yu		DATE 2019-07-29	
TOLERANCE		SCALE 6:1		SIZE A4		SHEET 1 OF 2				DWG NO SSL11-J4C00-000001		CHECKED BY Fisher Wang		DATE 2019-07-29	
.X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±		REV. F		WC-REV. C.3		CC: Inspection item				CUSTOMER ALTW		APPROVED BY Max Yang		DATE 2019-07-29	

MATERIALS

1. Carrier Tape: Polystyren (PS)
2. Cover Tape: Polystyren (PS)
3. Reel: Polystyren (PS)

QUANTITY

1. 1000Pcs Per Reel
2. 8 Reel Per Carton (8000Pcs/Carton)
3. Reference Standard: EIA-481-D
4. Net Weight: 1.6Kg/Carton.
5. Gross Weight: 5.8Kg/Carton.

