
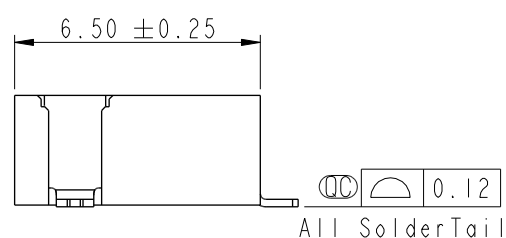
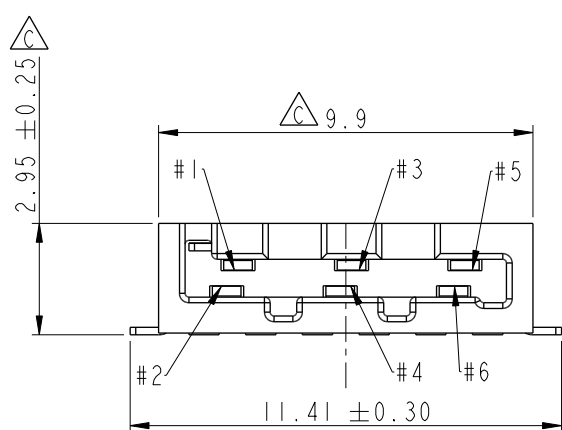
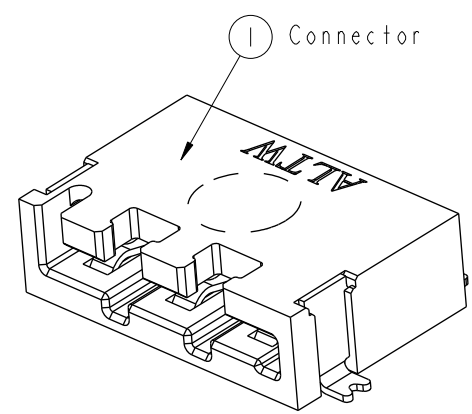
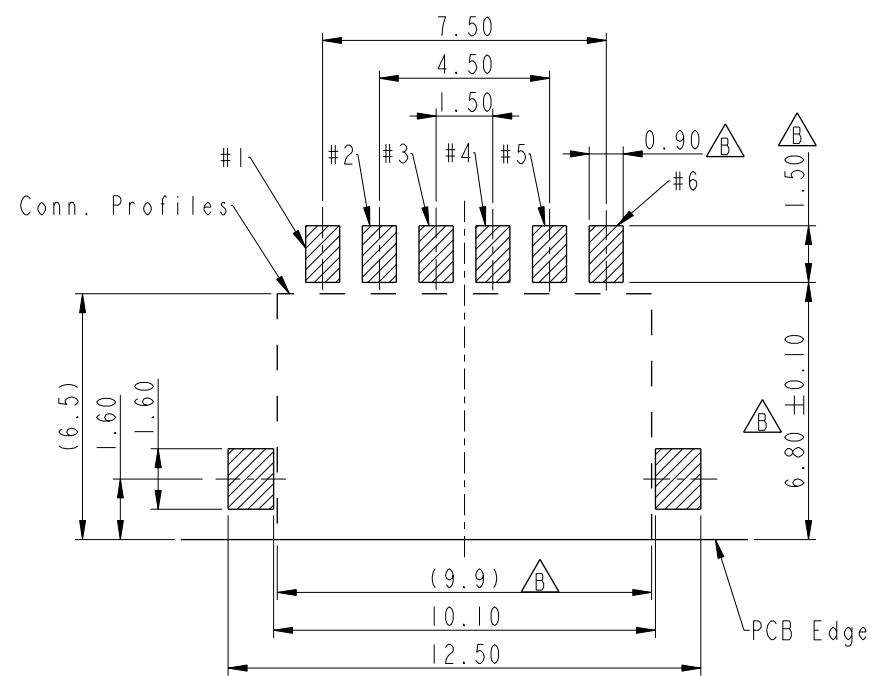



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
D	C191496	2019-08-29	NianPing Yu	Add UL Label
E	C192063	2019-12-03	NianPing Yu	△E X1
F	C220940	2022-06-20	Ruru	△E X3

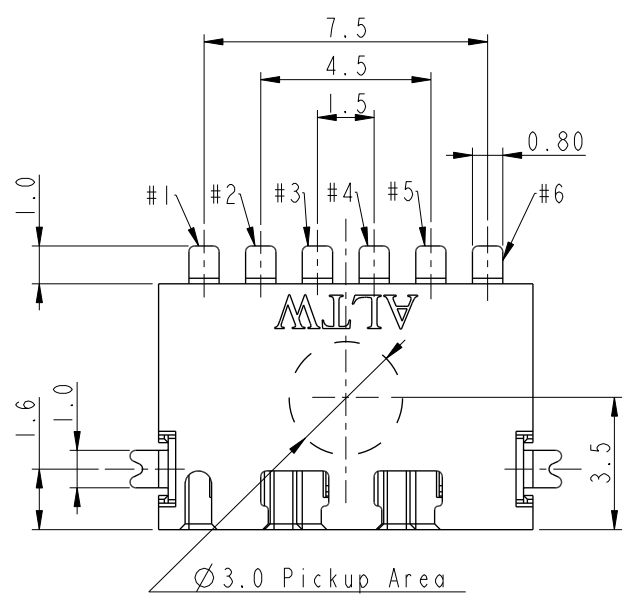

- Notes:
- * △C Important Dimension To Check.
 - * Housing: High temperature thermoplastic. UL94V-0, color is Natural white.
 - * △B Terminal: Copper Alloy, Gold Plated on contact area. Tin plated on solder tails.
 - * Solder Peg: Copper Alloy, Tin plated over Nickel.

UNIT: mm		TITLE		Amphenol LTW		ITEM NO		DRAWN BY		DATE	
TOLERANCE		SSL, 1.1 NON WP, F, 6P		安費諾亮泰企業股份有限公司		SSL11-J6D00-000001		NianPing Yu		2019-08-29	
.X ±0.25		SMT R/A W/O POST, NONE				DWG NO		Fisher Wang		2019-08-29	
.XX ±0.1		SCALE 5:1				SSL11-J6D00-000001		Max Yang		2019-08-29	
.XXX ±0.05		SIZE A4				CUSTOMER					
ANGLES ±1°		REV. F				ALTW					
		WC-REV. C.3									
		SHEET 1 OF 2									
		QC: Inspection item									



A	
---	--



MATERIALS

1. Carrier Tape: Polystyren (PS)
2. Cover Tape: Polystyren (PS)
3. Reel: Polystyren (PS)

△C QUANTITY

1. 1000Pcs Per Reel
2. 8 Reel Per Carton (8000Pcs/Carton)
3. Reference Standard: EIA-481-D
4. Net Weight: 2.2Kg/Carton.
5. Gross Weight: 6.4Kg/Carton.

- QUANTITY

1. 1000Pcs Per Reel
2. 8 Reel Per Carton (8000Pcs/Carton)
3. Reference Standard: EIA-481-D
4. Net Weight: 2.2Kg/Carton.
5. Gross Weight: 6.4Kg/Carton.

A
