
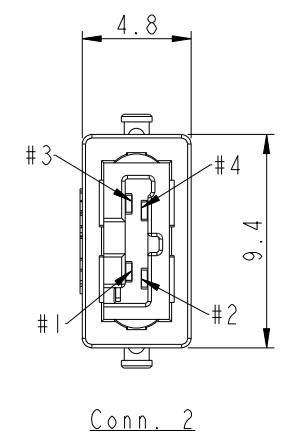
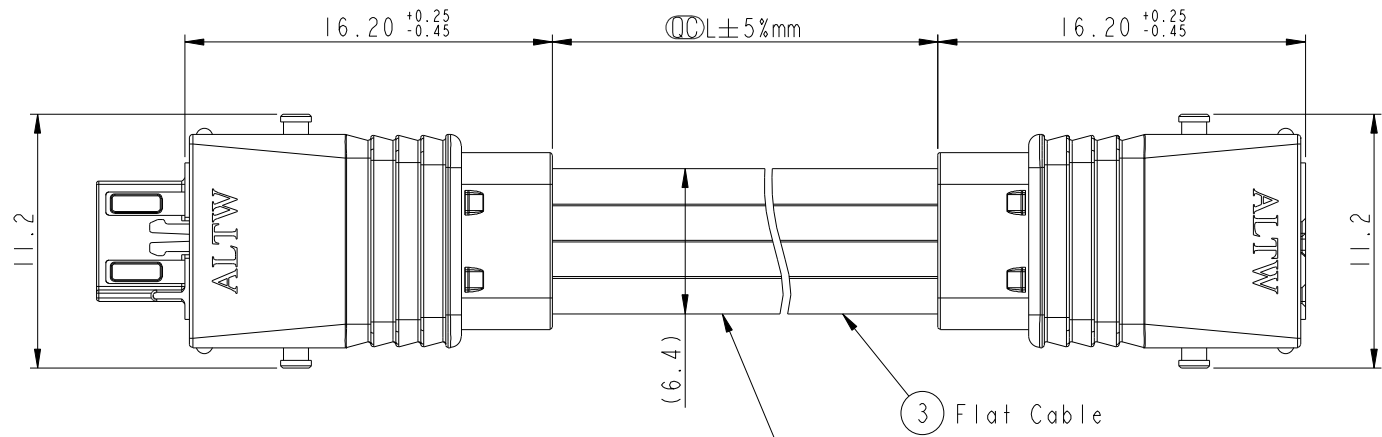
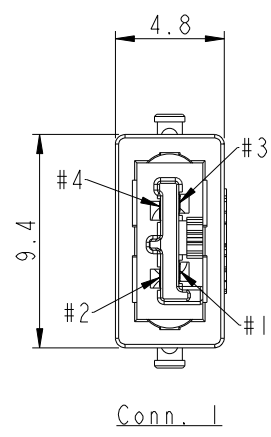
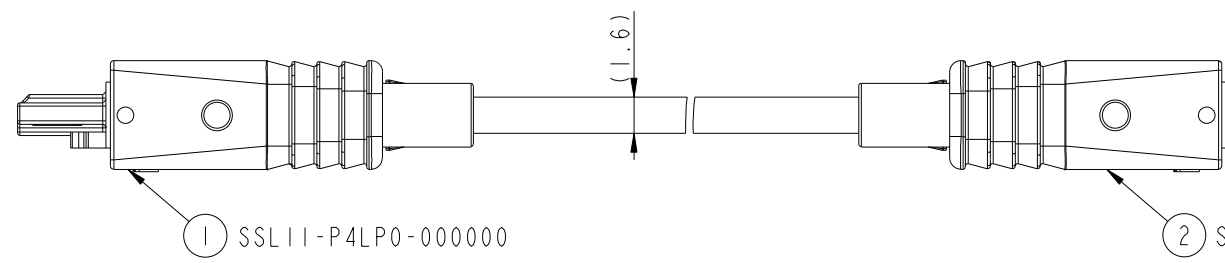


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2014-04-16	Fisher	Initial Release




4	White	白色	4
3	White	白色	3
2	White	白色	2
1	Blue Mark	藍色	1
Conn. 1	Wire Color	Conn. 2	

Pin Out

06: L=600mm.
Cable Length Range(L): 100~9900 mm

22: 22AWG
LOCK&LATCH OPTION
0: W/O LOCK

- Notes:
- * $\varnothing$ Important Dimensions To Check.
 - * Housing: Thermoplastic, UL94V-0, Natural White.
 - * Terminal: Copper Alloy, Gold Plated.
 - * Hood: Thermoplastic, UL94V-0, Natural White.
 - * SR Mold: PP, UL94V-0, Natural White.
 - * Flat Cable: UL21016, 4F * 22AWG, XLPE Insulation, White



UNIT:mm		TITLE	SSL11 Flat Cable, 4-Pos. W/O Lock, Plug to Jack		
TOLERANCE		SCALE	3:1	SIZE	A4
.X ±0.25		REV.	A	WC-REV.	A.2
.XX ±0.1					
.XXX ±0.05					
ANGLES ±1°					

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	Fisher_Wang	2014-04-16
SSL11-P4LJP-022DXX	CHECKED BY	DATE
CUSTOMER	Ivan_Lin	2014-04-16
ALTW	APPROVED BY	DATE
	Kevin_Hu	2014-04-16