

	1	2	3	4	5	6	7	8	
F					REV.	ECN NO.	DATE	SIGN	DESCRIPTION
					D	LEN1280080~84	2012/08/16	Ruru	Modify Note.
					E	LEN1530265~69	2014/12/17	Ruru	Change Logo
					F	C211612	2021/11/10	San	 X2
E									
D									
C									
B									
A									

Drain	28AWG	地線	Shield
Black	28AWG	黑	4
Green	28AWG	綠	3
White	28AWG	白	2
Red	28AWG	紅	1
Wire Color		Conn.	
Pin Out			

UNIT:mm



TOLERANCE
±0.5 mm

TITLE
USB, A TYPE, 2.0, CABLE W/O SR
F, M, MOLDING, SCREW 

SCALE 1:1	SIZE A4	SHEET 1	OF 1
REV. F	WC-REV. A.6	 :Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DWG NO	CUSTOMER	DRAWN BY	CHECKED BY	APPROVED BY	DATE
	UA-20BFMM-SL7AXX	ALTW	Ruru	Rita	Win	2014/12/17
						2014/12/17
						2014/12/17

Notes:

- *  Important Dimension.
- * Waterproof Rate: IP67
- * Connector: USB2.0-A Male Solder
- * Cable:USB 2.0,28#*1P+24#*2C+A1/My+D+B,
- * Cable Length Tolerance:<=0.3M +25/-0
>0.3M~1.5M +50/-0
>1.5M~3M +100/-0
>3M~5M +150/-0

XX:01~05Meters
01:01Meter
02:02Meters
:
05:05Meters
Cable Length(L):01~05Meters

UA-20BFMM-SL7A XX

Pin4
Pin1
Conn.

42.6

⌀L (mm)


Cable

UA-20BFMM-SL7000
Color: Black

Twist

ALTW



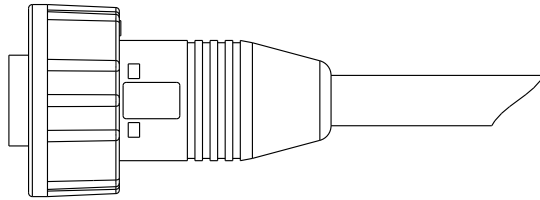

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.