



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	LEN15C0113-16	2015/11/05	Ruru	Change Logo
D	LEN1660935-38	2016/06/25	Jinhai	Change Gasket
E	C230353	2023/03/14	Ruru	EX3

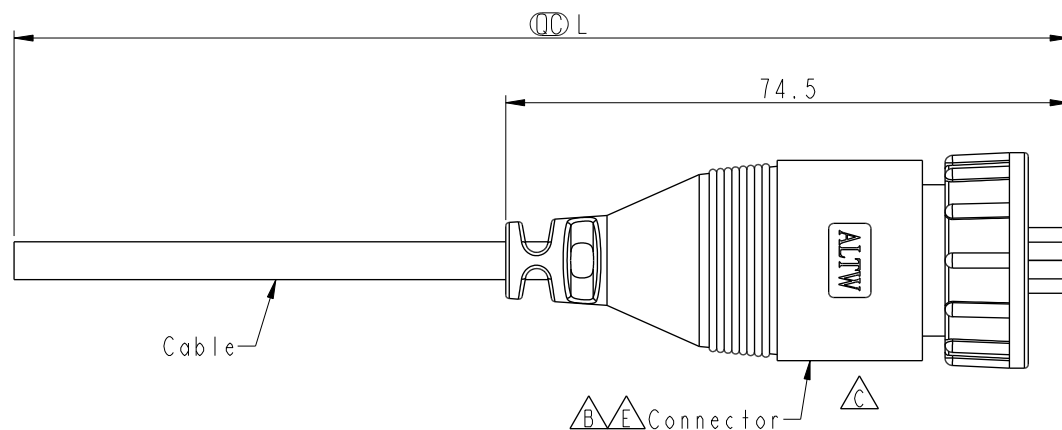

UB-20AFMM-LL7AXX

```
XX:01~05Meters
01:01Meters
02:02Meters
:
:
05:05Meters
Cable Length(L):01~05Meters
```

Shielded	Drain 地線
4	Black (24 AWG) 黑
3	Green (28 AWG) 綠
2	White (28 AWG) 白
1	Red (24 AWG) 紅
Conn	Wire Color

Twist

Note:

- *  Important Dimension
- * Waterproof Rate: IP67
- * Connector: USB B Type Male Solder Type
- *  Cable: USB 2.0, 28#*1P+24#*2C+Al/My+D+B,
PVC Jacket UV Resistant, OD=5.0, Black
- * All Parts Are RoHS Compliant
- *  Cable Length Tolerance: 01M: ±40mm
02M~05M: ±60mm
06M~10M: ±100mm
11M~30M: ±200mm
31M~99M: ±500mm

UNIT: mm		TITLE USB, B TYPE, 2.0, CABLE W/SR F, M, MOLDING, 2LOCK 		
TOLERANCE ±0.5 mm		SCALE 1:1	SIZE A4	SHEET 1 OF 1
		REV. E	MC-REV. A.1	QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Jinhai	DATE 2016-06-25
DWG NO UB-20AFMM-LL7AXX	CHECKED BY Feng-li	DATE 2016-06-25
CUSTOMER ALTW	APPROVED BY Jerry	DATE 2016-06-25