


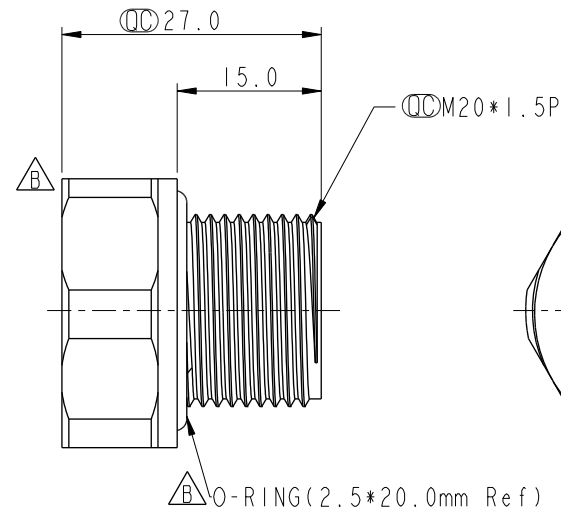
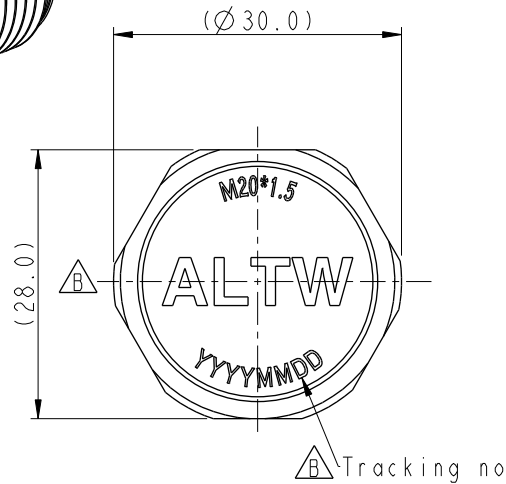


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C230541	2023/04/25	Hao tian	 X5
C	C240590	2024/05/28	Vicky	 X4

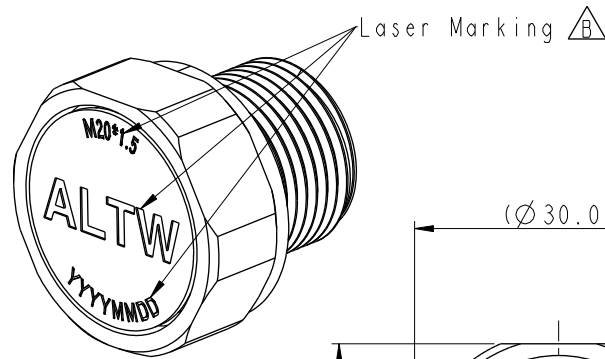


VENT-MS4NME-08002

S4: M20*1.5 — ME: Metallic

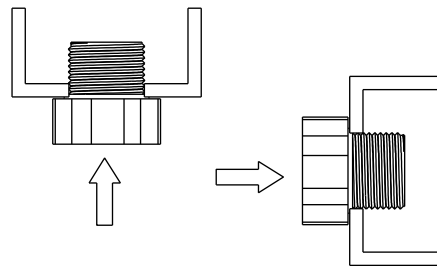

Recommended
installation orientation
建議安裝朝向

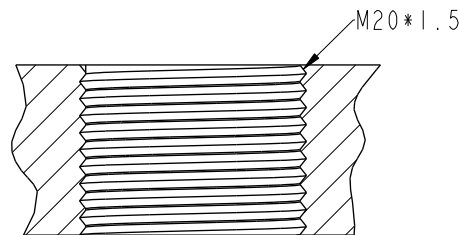

Recommended Panel Cut-Out
建議開孔尺寸

Note:

- *  Important Dimension.
- * Waterproof Rate: IP68(2m/1h), IP69K
- * Body: Aluminum Alloy, Anodizing
- * Cap: Aluminum Alloy, Anodizing
- * Membrane: ePTFE
- * O-Ring: Silicone, UL94V-0
- * Air Permeability: >1400ml/min at 7 kPa
- * Opening Pressure: 12±2 kPa
- * Recommended Torque: 30.6~51 kgf.cm

UNIT : mm			TITLE VENT, M20, ME 1400ML/MIN, SR			 Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO VENT-MS4NME-08002		DRAWN BY Vicky		DATE 2024-05-28		
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±			SCALE 3:2		SIZE A4		SHEET 1 OF 1	DWG NO VENT-MS4NME-08002		CHECKED BY Rita		DATE 2024-05-28	
			REV. C		WC-REV. .0		QC: Inspection item	CUSTOMER ALTW		APPROVED BY Fred		DATE 2024-05-28	

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.