

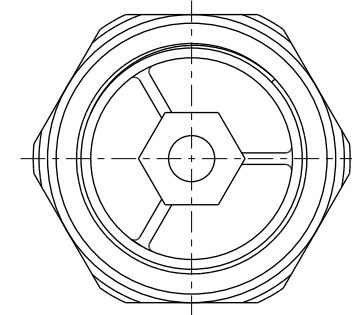
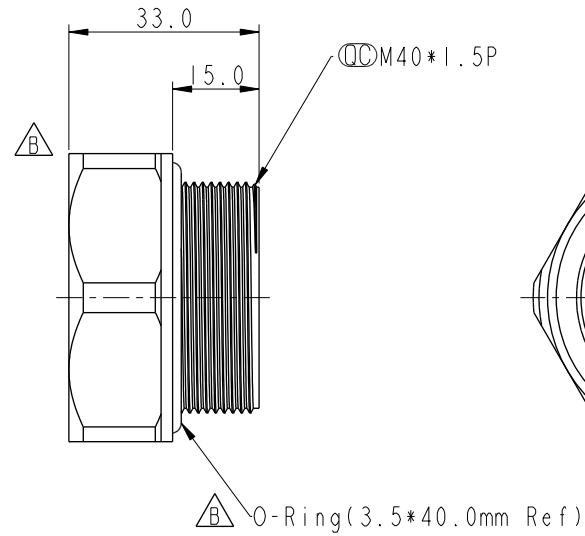


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C230541	2023/04/25	Hao tian	 X5
C	C240590	2024/05/28	Vicky	 X4

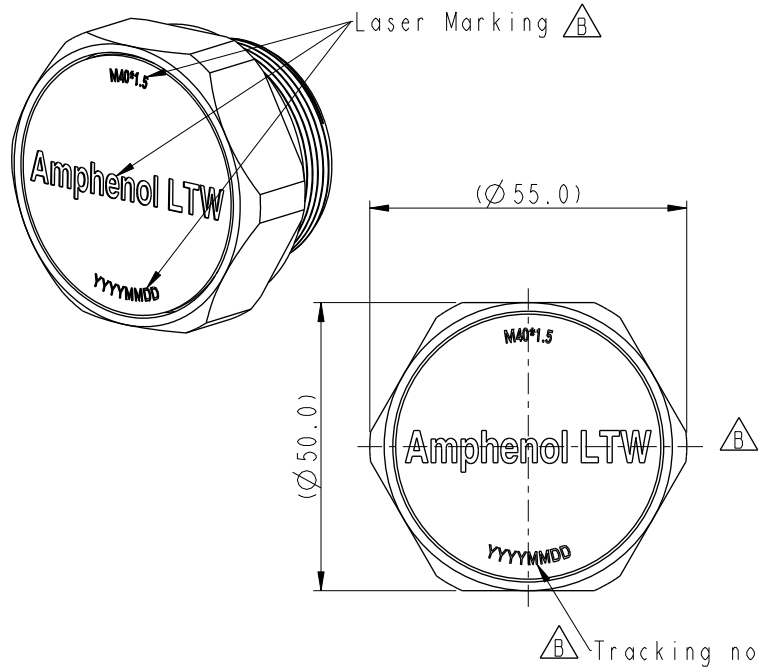


VENT-MS5NME-08002

S5: M40*1.5 — ME: Metallic

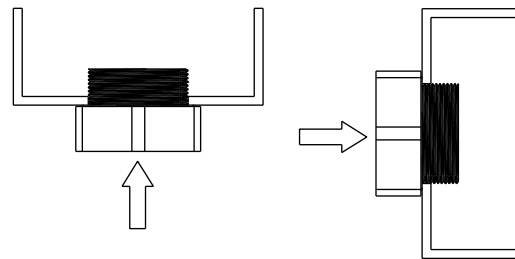

Recommended
installation orientation
建議安裝朝向

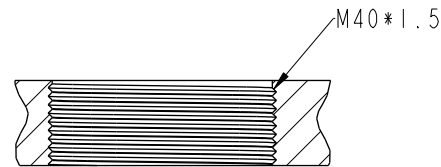

Recommended Panel Cut-Out
建議開孔尺寸

Note:

- *  Important Dimension.
- * Waterproof Rate: IP68(2m/1h), IP69K
- * Body: Aluminum Alloy, Anodizing
- * Cap: Aluminum Alloy, Anodizing
- * Membrane: ePTFE
- * O-Ring: Silicone, UL94V-0
- *  Air Permeability: >3000ml/min at 7 kPa
- *  Opening Pressure: 6±2 kPa
- *  Recommended Torque: 35.7~56 kgf.cm

UNIT : mm			TITLE VENT, M40, ME 3000ML/MIN, SR		Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO VENT-MS5NME-08002	DRAWN BY Vicky	DATE 2024-05-28
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES +		SCALE 3/4	SIZE A4	SHEET 1 OF 1		DWG NO VENT-MS5NME-08002	CHECKED BY Rita	DATE 2024-05-28
		REV. C	WC-REV. .0	QC: Inspection item		CUSTOMER ALTW	APPROVED BY Fred	DATE 2024-05-28