


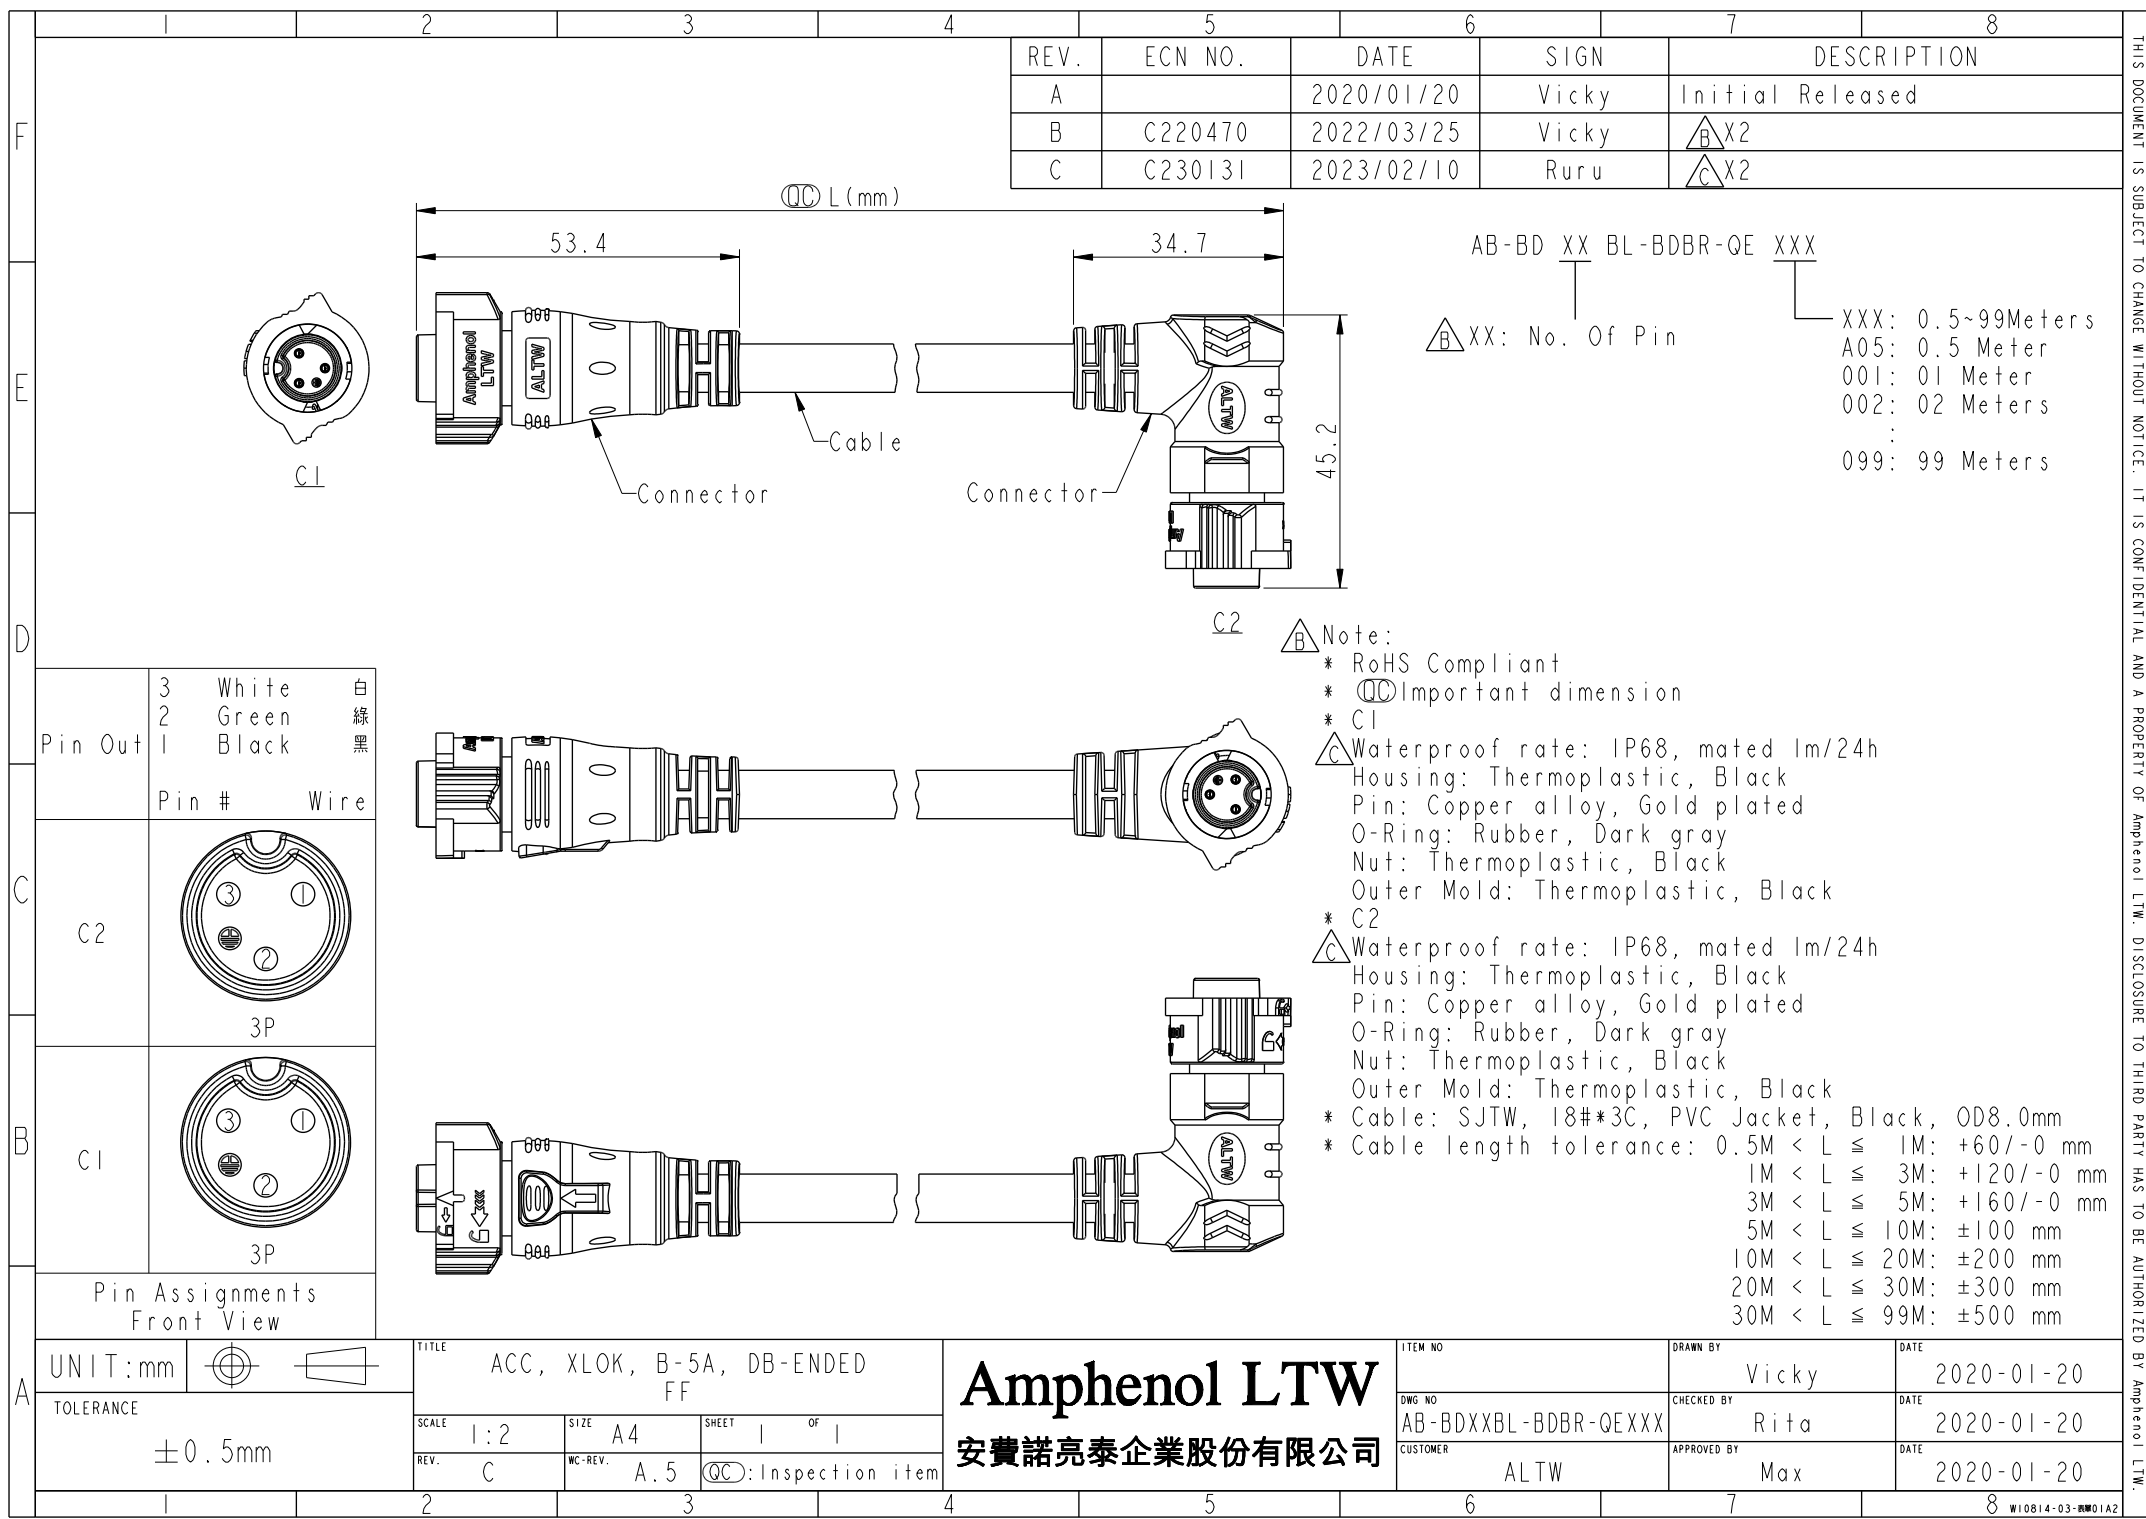

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2020/01/20	Vicky	Initial Released
B	C220470	2022/03/25	Vicky	△B X2
C	C230131	2023/02/10	Ruru	△C X2

AB-BD XX BL-BDBR-QE XXX
△B XX: No. Of Pin
XXX: 0.5~99Meters
A05: 0.5 Meter
001: 01 Meter
002: 02 Meters
:
099: 99 Meters

Pin Out	3 White 白 2 Green 綠 1 Black 黑
Pin #	Wire
C2	
C1	

Note:
* RoHS Compliant
* Ⓞ Important dimension
* C1
△ Waterproof rate: IP68, mated 1m/24h
Housing: Thermoplastic, Black
Pin: Copper alloy, Gold plated
O-Ring: Rubber, Dark gray
Nut: Thermoplastic, Black
Outer Mold: Thermoplastic, Black
* C2
△ Waterproof rate: IP68, mated 1m/24h
Housing: Thermoplastic, Black
Pin: Copper alloy, Gold plated
O-Ring: Rubber, Dark gray
Nut: Thermoplastic, Black
Outer Mold: Thermoplastic, Black
* Cable: SJTW, 18#*3C, PVC Jacket, Black, OD8.0mm
* Cable length tolerance: 0.5M < L ≤ 1M: +60/-0 mm
1M < L ≤ 3M: +120/-0 mm
3M < L ≤ 5M: +160/-0 mm
5M < L ≤ 10M: ±100 mm
10M < L ≤ 20M: ±200 mm
20M < L ≤ 30M: ±300 mm
30M < L ≤ 99M: ±500 mm

UNIT:mm		TITLE	ACC, XLOK, B-5A, DB-ENDED FF	ITEM NO	DRAWN BY	DATE
TOLERANCE	±0.5mm	SCALE	1:2	DWG NO	CHECKED BY	DATE
		SIZE	A4	AB-BDXXBL-BDBR-QEXXX	Rita	2020-01-20
		SHEET	1 OF 1	CUSTOMER	APPROVED BY	DATE
		REV.	C	ALTW	Max	2020-01-20
		WC-REV.	A.5			
		QC	Inspection item			

Amphenol LTW
安費諾亮泰企業股份有限公司

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.