
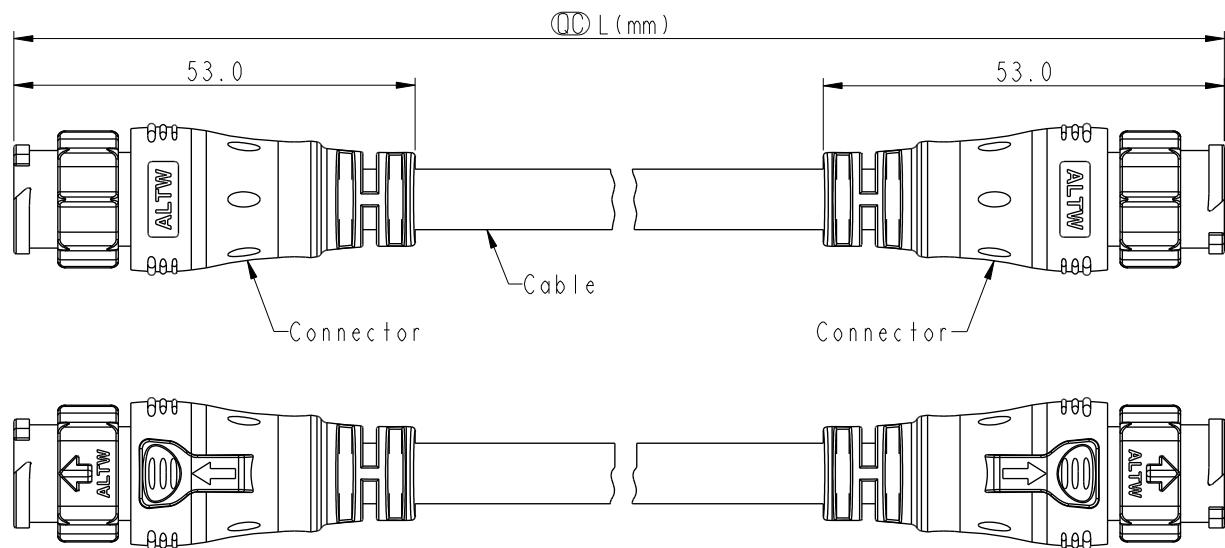


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2020/01/20	Vicky	Initial Released
B	C220473	2022/03/28	Vicky	△B X3
C	C230134	2023/02/10	Ruru	△C X1



Pin Out	3 White 2 Green 1 Black	白 綠 黑
	Pin #	Wire
C1 & C2	 3P	

△B Note:
 * RoHS Compliant
 * ⌀ Important dimension
 △C * Waterproof rate: IP68, mated 1m/24h
 * Connector
 Housing: Thermoplastic, Black
 Pin: Copper alloy, Gold plated
 Outer Mold: Thermoplastic, Black
 △B * Cable: SJTW, 18#*3C, PVC Jacket, Black, OD8.0mm
 * Cable length tolerance: 0.5M < L ≤ 1M: +60/-0 mm
 1M < L ≤ 3M: +120/-0 mm
 3M < L ≤ 5M: +160/-0 mm
 5M < L ≤ 10M: ±100 mm
 10M < L ≤ 20M: ±200 mm
 20M < L ≤ 30M: ±300 mm
 30M < L ≤ 99M: ±500 mm

AB-BD XX ML-BDML-QE XXX
 XX: No. Of Pin
 XXX: 0.5~99Meters
 A05: 0.5 Meter
 001: 01 Meter
 002: 02 Meters
 :
 099: 99 Meters

Pin Assignments Front View

UNIT:mm		TITLE		ACC, XLOK, B-5A, DB-ENDED	
TOLERANCE				MM	
±0.5mm		SCALE	1:2	SIZE	A4
		REV.	C	WC-REV.	A.5
				SHEET	1 OF 1
		⌀: Inspection item			

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY		DATE
	Vicky		2020-01-20
DWG NO	CHECKED BY		DATE
AB-BDXXML-BDML-QEXXX	Rita		2020-01-20
CUSTOMER	APPROVED BY		DATE
ALTW	Max		2020-01-20