

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
D	C221195	2022/09/15	Allen Pan	 XI
E	C230086	2023/01/31	Ruru	 XI
F	C250842	2025/06/26	Vicky	 XI

AD-XXPMMP-QC8001

XX: No. Of Pin

Recommended Panel Cut-out

White Printing

O-Ring

Connector

9/16"-24 UNS

Nut

Note:  

- * RoHS Compliant
- *  Important dimension
- *  Waterproof rate: IP68, unmated 1m/24h
- * Connector
- Housing: Thermoplastic, Black
- Pin: Copper alloy, Gold plated
- * Nut: Thermoplastic, Black
- * O-Ring: Rubber, Gray
- * Use with waterproof cap or dust cap
- Panel thickness max: 3.0mm
- * Use without waterproof cap or dust cap
- Panel thickness max: 4.0mm
- * For pcb thickness max: 2.0mm
- *  Nuts are packed separately in one bag



UNIT: mm	TOLERANCE	SCALE	SIZE	SHEET	OF	REV.	MC-REV.	QC: Inspection item
±0.25 mm	2:1	A4	1	2	F	A.5		

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DWG NO	CUSTOMER	DRAWN BY	CHECKED BY	APPROVED BY	DATE
	AD-XXPMMP-QC8001 	ALTW	Vicky	Rita	Fred	2025-06-26

W10814-03-RW01A2

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

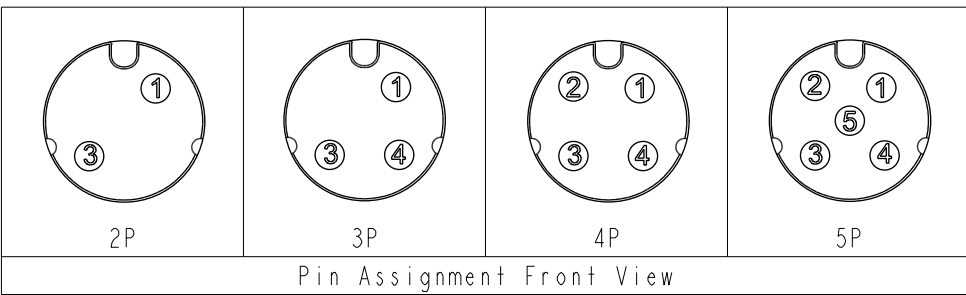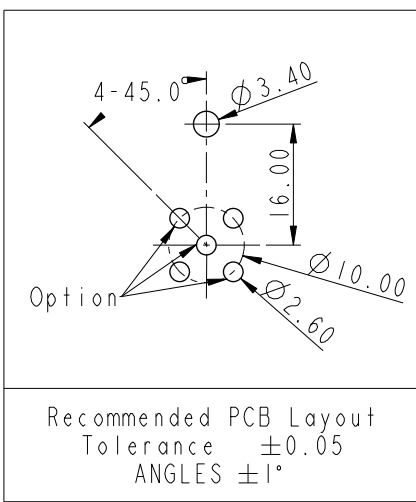

UNIT:mm			TITLE XLOK, A-5A, FRONT FASTENED M, M, PCB S, PUSH LOCK	
TOLERANCE ± 0.25 mm		SCALE 2:1	SIZE A4	SHEET 2 OF 2
		REV. F	WC-REV. A.5	QC: Inspection item

ITEM NO		DRAWN BY Vicky		DATE 2025-06-26	
DWG NO AD-XXPMMP-QC8001		CHECKED BY Rita		DATE 2025-06-26	
CUSTOMER ALTW		APPROVED BY Fred		DATE 2025-06-26	

Amphenol LTW
安費諾亮泰企業股份有限公司