
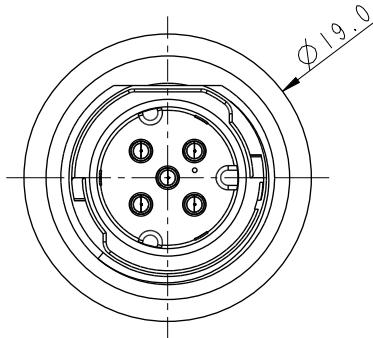


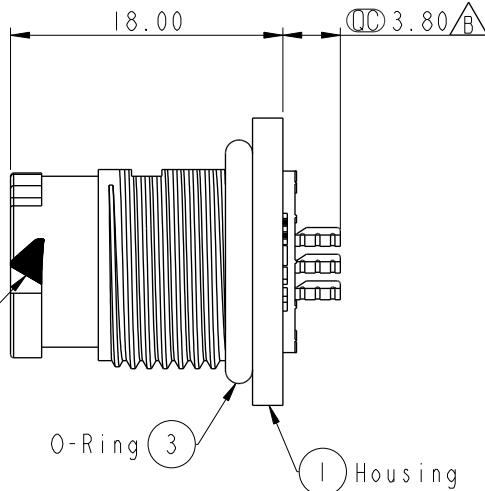



1	2	3	4	5	6	7	8
F				REV. G	ECN NO. C200351	DATE 2020/04/06	SIGN Allen Pan X4
L				H	C201628	2020/10/21	Vicky X1
D				I	C250842	2025/06/26	Vicky X3

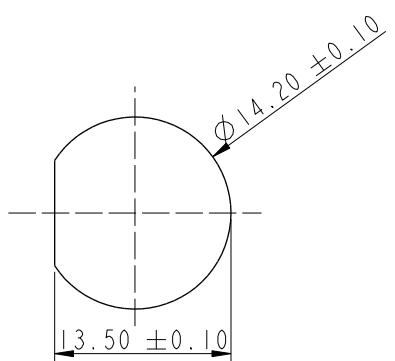

White Printing

Pin Assignments
Front View

Recommended Panel Cut-out

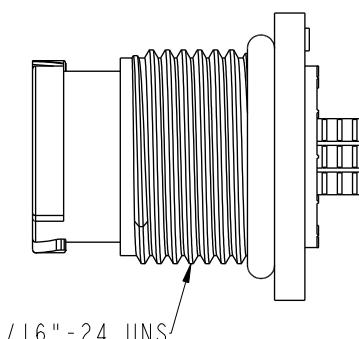

△ D Note:



- * **○** Important Dimension To Check.
- * Waterproof Rate: IP68, Unmated. In 1 meter water within 24 hours
- * Housing: Thermoplastic, Black.
- * Pin: Copper Alloy, Gold Plated.
- * Nut: Thermoplastic, Black.
- * O-Ring: Rubber, Gray.
- * Use Without Waterproof Cap Panel Thickness Max: 4.0mm
- * Use With Waterproof Cap Panel Thickness Max: 3.0mm
- * Nuts are packed separately in one bag.

UNIT:mm	
TOLERANCE	± 0.5mm

TITLE	XLOK, A-5A, FRONT FASTENED M, M, SOLDER, PUSH LOCK		
SCALE	1:1	SIZE	A4
REV.	1	WC-REV.	.0

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO △ G AD-XXPMMS-QC8001	Vicky	2025-06-26
CUSTOMER	CHECKED BY Rita	2025-06-26
ALTW	APPROVED BY Max	2025-06-26

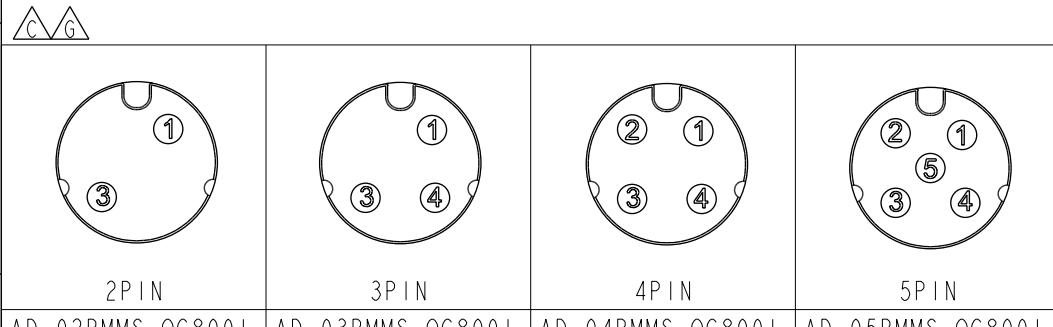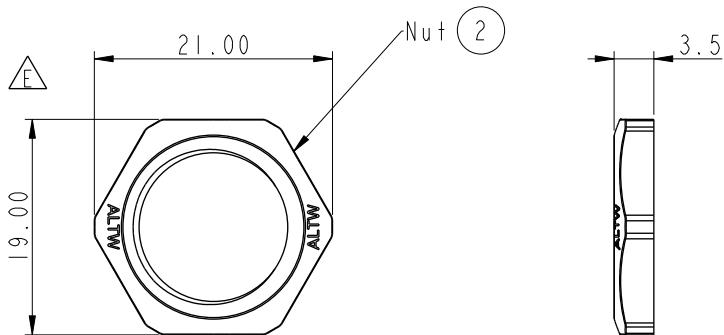

UNIT:mm		TITLE XLOK, A-5A, FRONT FASTENED M, M, SOLDER, PUSH LOCK		
TOLERANCE	$\pm 0.5\text{mm}$			SCALE 1:1 SIZE A4 SHEET 2 OF 2
		REV. 1	WC-REV. .0	(QC): Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

AD-XXPMMS-QC8001
XX: No. Of Pin

ITEM NO	DRAWN BY	DATE
DWG NO AD-XXPMMS-QC8001	Vicky	2025-06-26
CUSTOMER	CHECKED BY	DATE
ALTW	Rita	2025-06-26
APPROVED BY		DATE
Fred		2025-06-26