

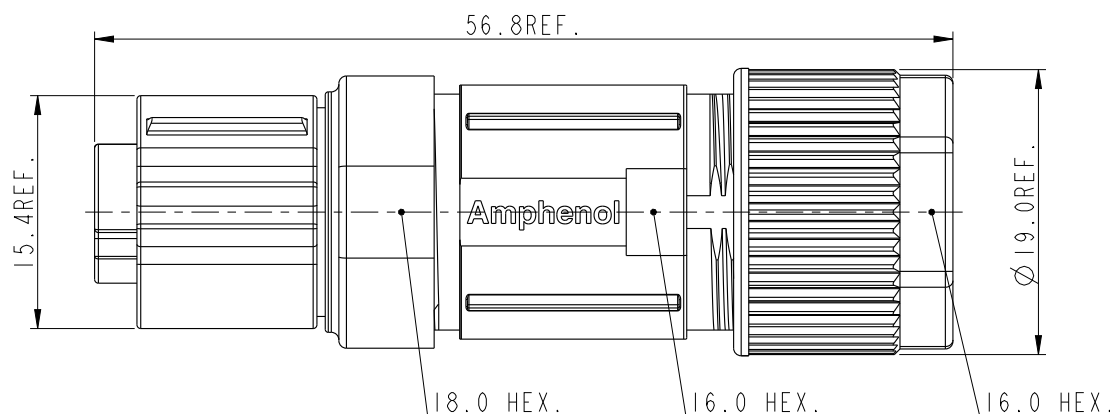


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2023-03-23	Sam Ho	Rev.02 to A, Initial Released
B	C241170	2024/10/17	Mingxin Gao	<u>B</u> x3

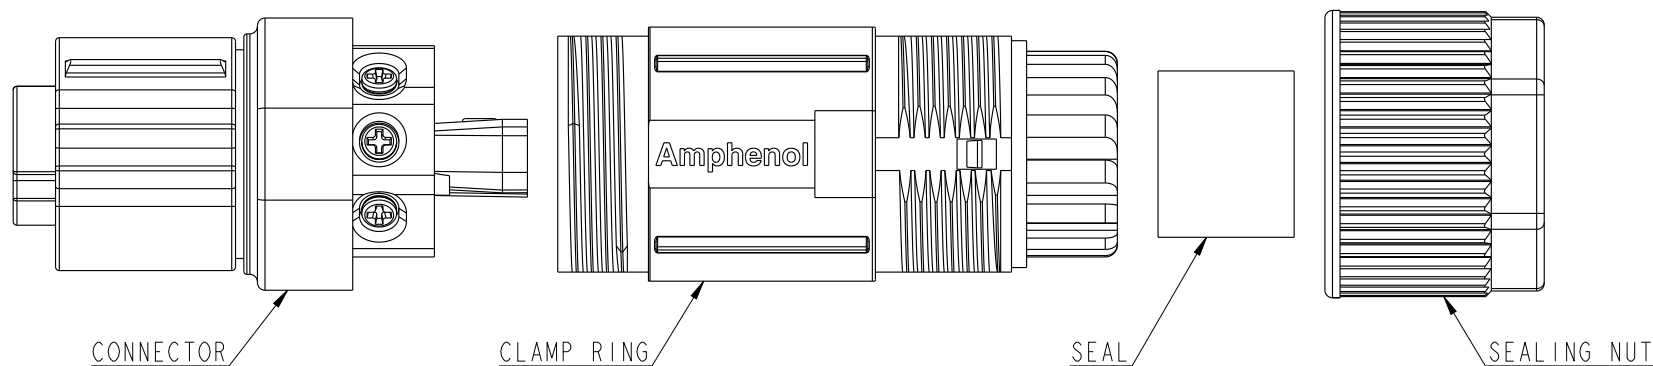

- * RoHS Compliant
- *  Important dimension
- * Waterproof rate: IP67, mated
- * Connector
 - Housing: Thermoplastic, Black
 - Terminal: Copper Alloy, Gold plated
 - Shield & Spring: Metal
 - XLOK Nut & Screw Nut: Metal
 - Screw & C-Ring: Metal
- * Clamp Ring: Metal
- * Seal: Rubber, Gray,
For Cable OD $\varnothing 4.0\text{mm} \sim \varnothing 8.0\text{mm}$
- * Sealing Nut: Metal
- * One Set Unassembled in One PE Bag.

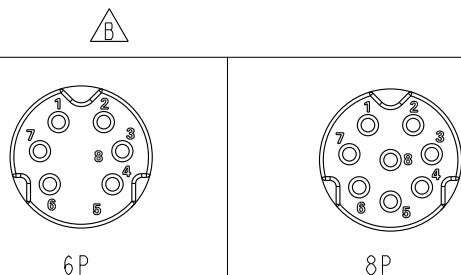

ASU-XXBFFB-QL7001

XX: No. Of Pin.

UNIT: mm	
TOLERANCE	
$\pm 0.50\text{mm}$	

TITLE				XLOK, A SHLD-2A, CABLE W/O SR F, F, FI SCREW IN, PUSH LOCK			
SCALE		2:1		SIZE		A4	
REV.		B		SHEET		OF 1	
WC-REV.				CC: Inspection item			

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Mingxin Gao	2024/10/17
DWG NO	CHECKED BY	DATE
ASU-XXBFFB-QL7001	Fisher Wang	2024/10/17
CUSTOMER	APPROVED BY	DATE
ALTW	Fred Lee	2024/10/17