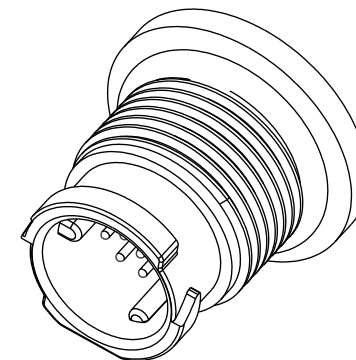
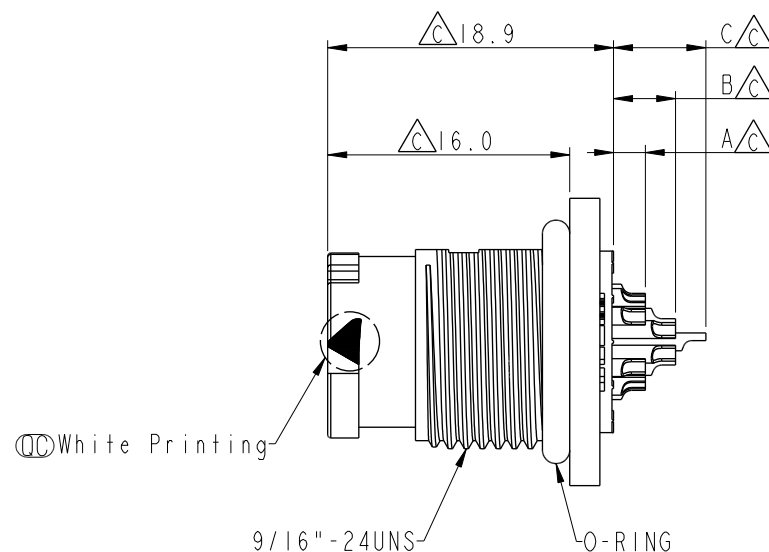
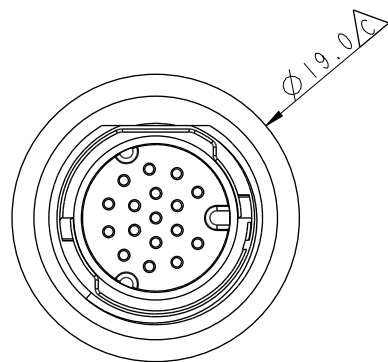


AZ-10PMMS-QC800I	2.1	4.1	
AZ-12PMMS-QC800I	2.1	4.1	
AZ-17PMMS-QC800I	2.1	4.1	6.1
Item No.	A	B	C
	Pin伸出長度		

 Note:

- * RoHS Compliant
- *  Important Dimension

 *

- * Waterproof Rate: IP68, Unmated 1m/24h
- * Connector

Housing: Thermoplastic, Black

Pin: Copper Alloy, Gold Plated

- * Nut: Thermoplastic, Black
- * O-Ring: Rubber, Gray
- * Use without waterproof cap or dust cap
Panel thickness Max: 4.0mm
- * Use with waterproof cap or dust cap
Panel thickness Max: 3.0mm

 *

- * Nuts are packed separately in one bag

UNIT : mm		
TOLERANCE		
.X	± 0.25	
.XX	± 0.1	
.XXX	± 0.05	
ANGLES	$\pm 1^\circ$	

TITLE		XLOK, A-1.5A, FRONT FASTENED M, M, SOLDER, PUSH LOCK		
SCALE	1 : 1	SIZE	A4	SHEET 1 OF 2
REV.	E	WC-REV.	.0	<u>QC</u> : Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Vicky	DATE 2025-06-26
DWG NO AZ-XXPMMS-QC8001	CHECKED BY Rita	DATE 2025-06-26
CUSTOMER ALTW	APPROVED BY Fred	DATE 2025-06-26

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

B

F



E

D

C


B

A

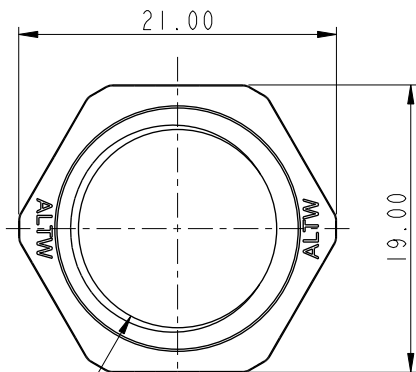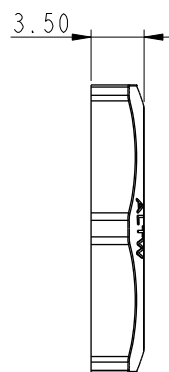


9/16"-24UNS


NUT



10Pin




12Pin



17Pin


Pin Assignments Front View(10~17PIN)

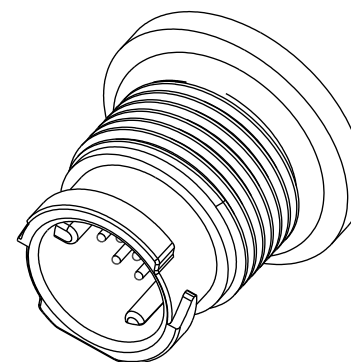

AZ-XXPMMS-QC8001

XX: No. Of Pin

UNIT:mm



TITLE
XLOK, A-1.5A, FRONT FASTENED
M, M, SOLDER, PUSH LOCK



Amphenol LTW

安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	CHECKED BY	DATE
CUSTOMER	APPROVED BY	DATE

TOLERANCE
.X ±0.25
.XX ±0.1
.XXX ±0.05
ANGLES ±1°



SCALE	SIZE	SHEET	OF
REV.	WC-REV.	QC:Inspection item	