


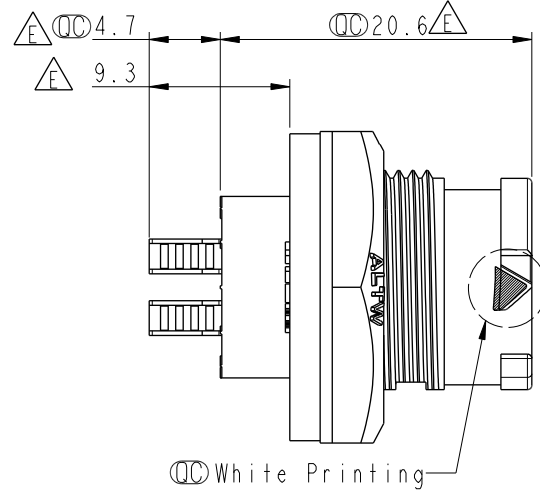
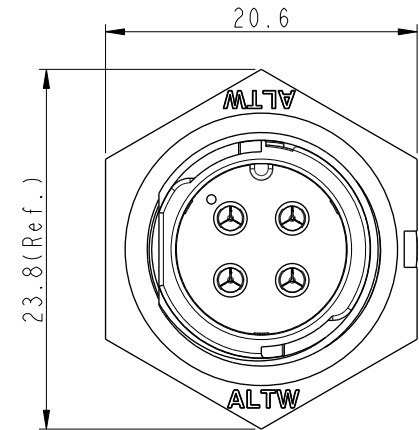


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	C220466	2022/04/13	Ruru	 X5
D	C230086	2023/01/31	Ruru	 X1
E	C241346	2025/01/17	Victor Hung	 X3

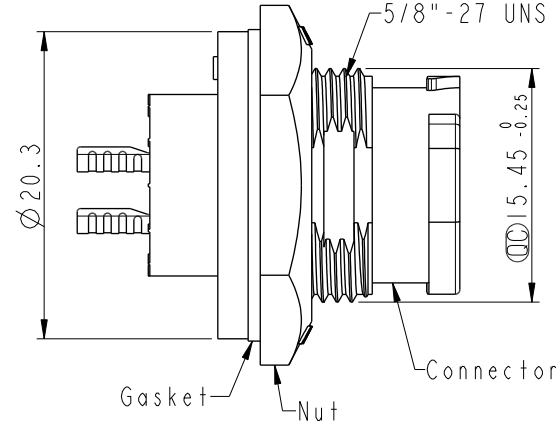

Recommended
Panel Cut-out

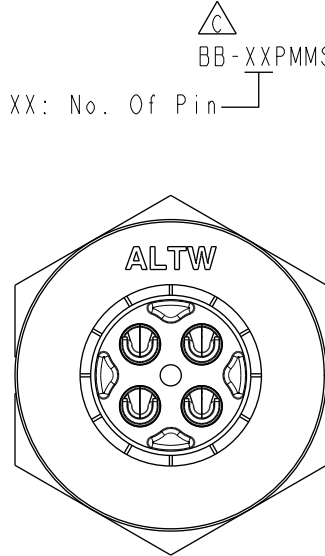


Note:  

- * RoHS Compliant
- *  Important dimension
- *  Waterproof rate: IP68, unmated 1m/24h
- * Connector

Housing: Thermoplastic, Black
Pin: Copper alloy, Gold plated

- * Nut: Thermoplastic, Black
- * Gasket: Rubber, Gray
- * Use with waterproof cap or dust cap
Panel thickness max: 3.0mm
- * Use without waterproof cap or dust cap
Panel thickness max: 4.0mm
- * Gasket and nut are packed separately
in pe bag

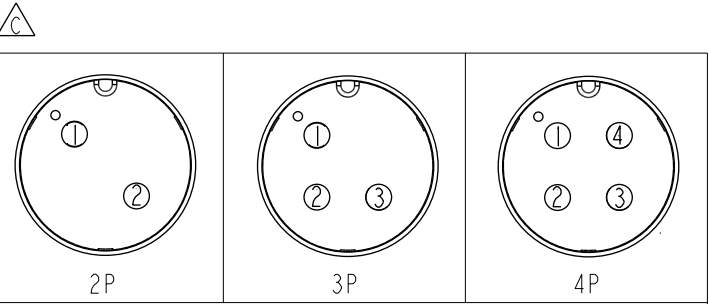

Pin Assignment Front View

UNIT:mm				TITLE XLOK, B-10A, FRONT FASTENED M, M, SOLDER, PUSH LOCK 			
TOLERANCE				SCALE	SIZE	SHEET	OF
.X ± 0.25 mm				2:1	A4	1	1
				REV. E	WC-REV. .0	QC: Inspection item	

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Victor Hung	2025/01/17
DWG NO	CHECKED BY	DATE
BB-XXPMS-QC8001 	Neo Tasi	2025/01/17
CUSTOMER	APPROVED BY	DATE
ALTW	Fred Lee	2025/01/17