
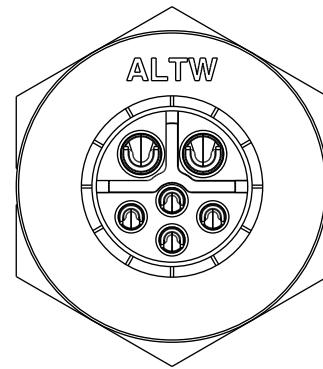
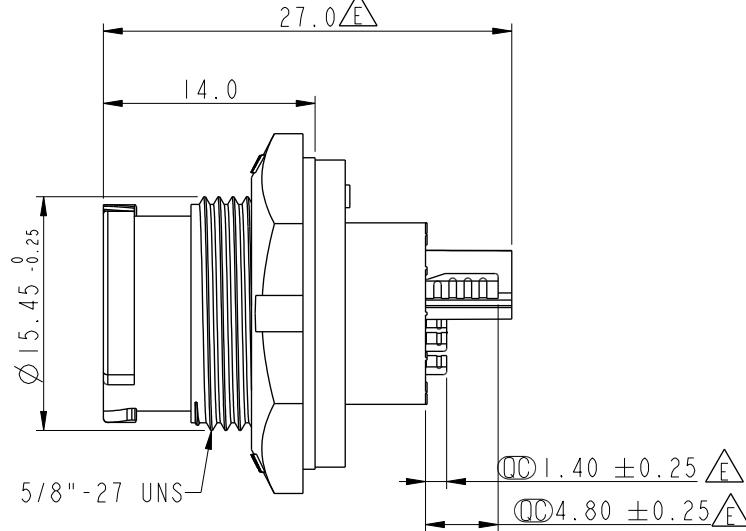


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
C	C220644	2022/04/27	Ruru	 X4
D	C230086	2023/01/31	Ruru	 X1
E	C250265	2025/03/25	Victor Hung	 X3


C

BBB - XXXPMMS - QC800 |

XX: No. Of Pin

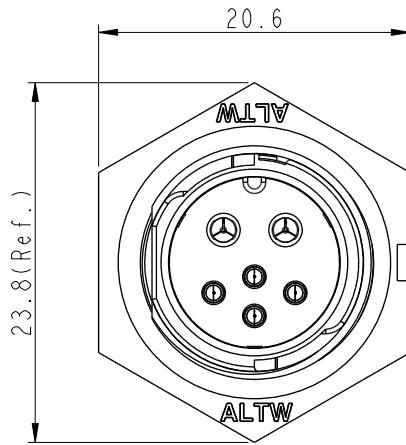

QC White Printing

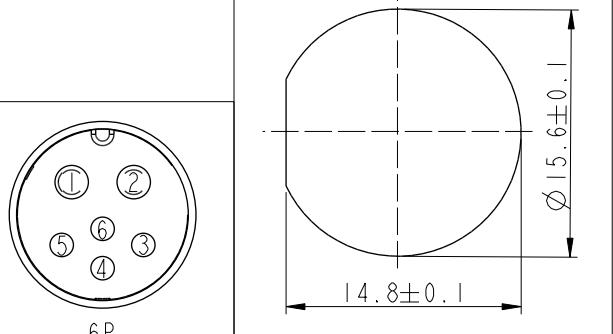

Pin Assignment Front View

Recommended
Panel Cut-out

UNIT : mm

TOLERANCE

- . X
- . XX
- . XXX

ANGLES

E
 ± 0.25
 ± 0.1
 ± 0.05
 ± 1

TITLE XLOK,
M,
SCALE 2:1
REV. E

-10A+5A, FRONT FASTENED
1, SOLDER, PUSH LOCK

OF |

Amphenol LTW

安費諾亮泰企業股份有限公司

Note:

* RoHS Compliant

*  Important dimension

* Waterproof rate: IP68, unmated 1m/24h
* Connector

Housing: Thermoplastic, Black
Pin: Copper alloy. Gold plated

* Nut: Thermoplastic, Bla
* Gasket: Rubber, Gray

* Use with waterproof cap or dust cap
Panel thickness max. 3.0mm

* Use without waterproof cap or dust cap

* Panel thickness max: 4.0mm
* Gasket and nut are packed separately
in pe bag

ITEM NO	DRAWN BY Victor Hung	DATE 2025/03/25
DWG NO BBD-XXPMMS-QC8001	CHECKED BY Neo Tasi	DATE 2025/03/25
CUSTOMER ALTW	APPROVED BY Fred Lee	DATE 2025/03/25