
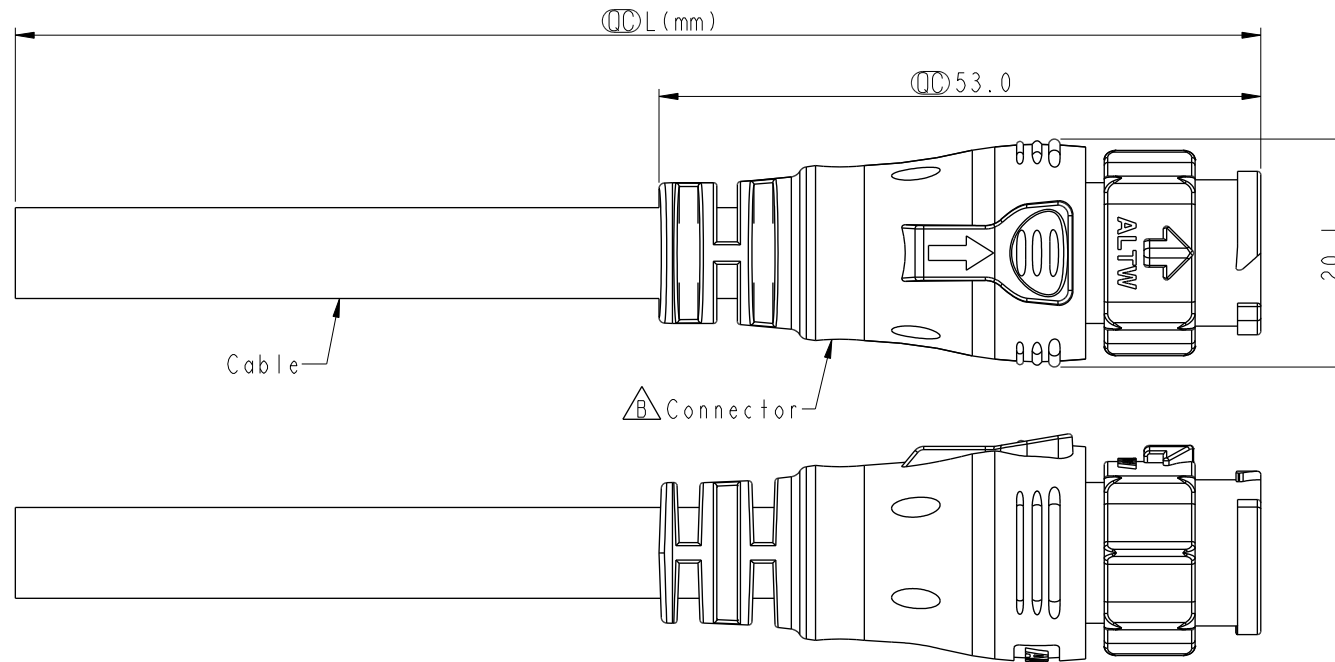


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LE31680207	2016/07/18	Tom Gu	Change Part No. of Half Finished
C	C220466	2022/04/13	Ruru	 X5
D	C230121	2023/02/06	Ruru	 X1



	3 White 2 Green 1 Black  白 綠 黒
Pin Out	Pin # Wire
Conn.	 3P 

△
C

BD-XXAMMM-QL8EXX

XX: No. Of Pin

XX : 01~99Meters
01 : 01Meter
02 : 02Meters
:
:
99 : 99Meters

Note:  Conn.

- * RoHS Compliant
- *  Important dimension
- *  Waterproof rate: IP68, mated 1m/24h
- * Connector

Housing: Thermoplastic, Black
Pin: Copper Alloy, Gold Plated
Outer mold: Thermoplastic, Black

- * Cable: SJTW, 18#*3C, OD=8.0, PVC Jacket, Black
- * Cable length tolerance: 1M: +50/-0 mm

1M < L ≤ 3M:	+100/-0 mm
3M < L ≤ 5M:	+150/-0 mm
5M < L ≤ 10M:	±100 mm
10M < L ≤ 20M:	±200 mm
20M < L ≤ 30M:	±300 mm
30M < L ≤ 99M:	±500 mm

Pin Assignments Front View	
UNIT: mm	
TOLERANCE	
± 0.5 mm	

TITLE			
XLOK, B-5A, CABLE W/SR M, M, MOLDING, PUSH LOCK 			
SCALE	3:2	SIZE	A4
SHEET	1	OF	1
REV.	D	WC-REV.	A.2
QC: Inspection item			

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
	Tom Gu	2016-07-18
DWG NO	CHECKED BY	DATE
BD-XXAMMM-QL8EXX 	Spring Liu	2016-07-18
CUSTOMER	APPROVED BY	DATE
ALTW	Kevin Hu	2016-07-18