


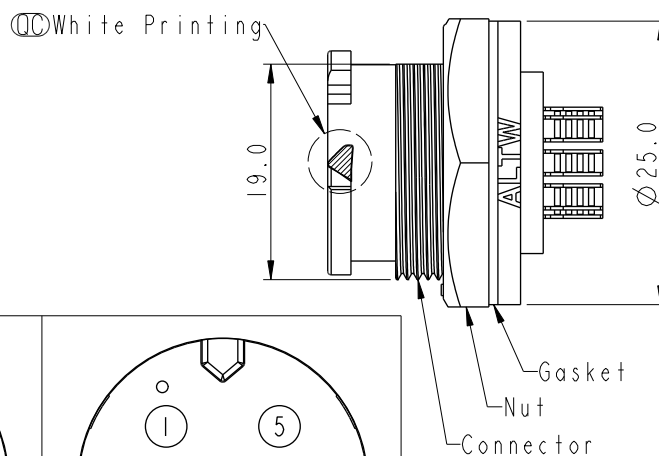
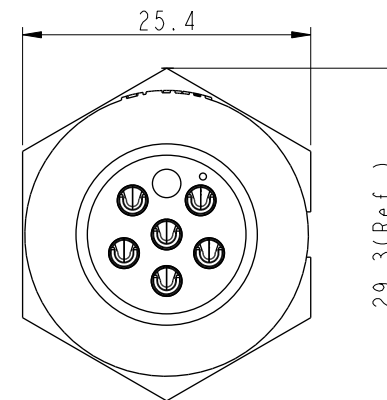
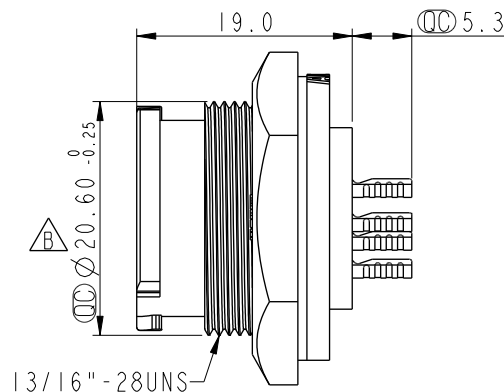



 CB-XX PMMS-QC800 I
 XX: No. Of Pin



4P



5P



6P

Note:

- * RoHS Compliant
- *  Important dimension
- *  Waterproof rate: IP68, unmated 1m/24h
- * Connector

Housing: Thermoplastic, Black
Pin: Copper Alloy, Gold plated

- * Nut: Thermoplastic, Black
- * Gasket: Rubber, Gray
- * Use with waterproof cap or dust cap
Panel thickness max: 3.0mm
- * Use without waterproof cap or dust cap
Panel thickness max: 4.2mm
- * Gasket and nut are packed separately
in pe bag

UNIT: mm				TITLE XLOK, C-10A, FRONT FASTENED M, M, SOLDER, PUSH LOCK					
TOLERANCE				SCALE	SIZE	SHEET		OF	
.X ±0.25				3:2	A4	1		1	
.XX ±0.1									
.XXX ±0.05									
ANGLES ±1				REV. E	WC-REV. A.4	QC: Inspection item			

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Vicky	DATE 2019-03-20
DWG NO dCB-XXPMMS-QC8001	CHECKED BY Rita	DATE 2019-03-20
CUSTOMER ALTW	APPROVED BY Max	DATE 2019-03-20