

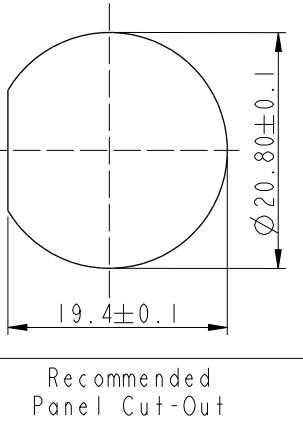
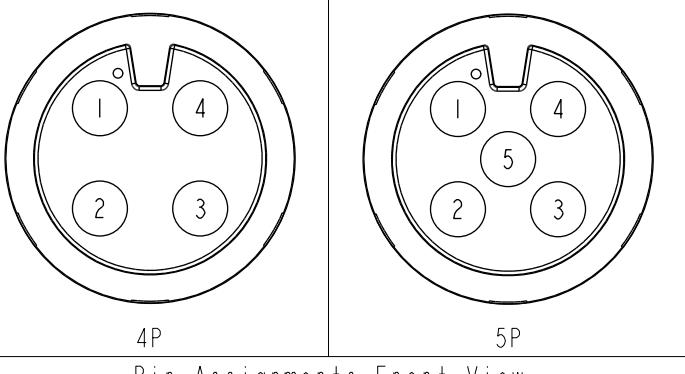
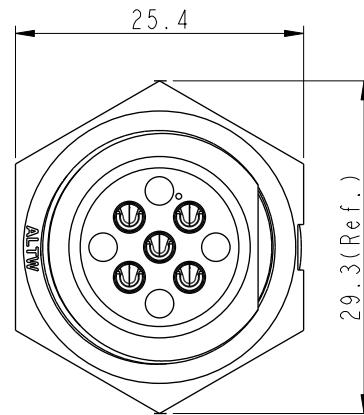


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	C190470	2019/03/20	Vicky	Change Note
C	C220628	2022/05/09	Vicky	C X4
D	C230084	2023/01/30	Vicky	D X1

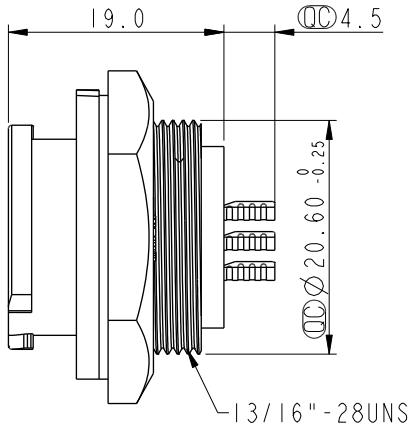


XX: No. Of Pin -



Pin Assignments Front View

QC White Printing

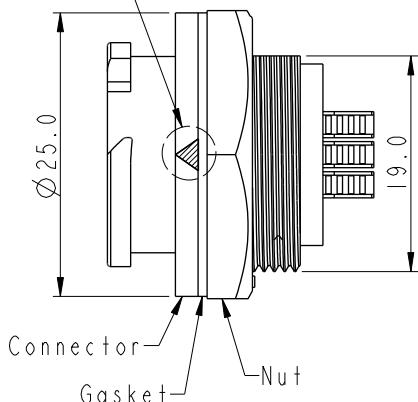

△ABC

Note:

- * RoHS Compliant
- *  Important dimension
- * Waterproof rate: IP68, unmated 1m/24h
- * Connector
- Housing: Thermoplastic, Black
- Pin: Copper Alloy, Gold plated
- * Nut: Thermoplastic, Black
- * Gasket: Rubber, Gray
- * For panel thickness max: 4.2mm
- * Gasket and nut are packed separately in pe bag

Amphenol LTW

PIN ASSIGNMENTS FRONT VIEW					
A	UNIT:mm	 	TITLE	XLOK, C-10A, REAR FASTENED M, F, SOLDER, PUSH LOCK	
	TOLERANCE			SCALE	SIZE
	.X	± 0.25		3:2	A4
	.XX	± 0.1			SHEET
	.XXX	± 0.05			OF
	ANGLES	$\pm 1^\circ$	REV.	D	QC-REV.
				A.3	(QC): Inspection item
			?	3	