


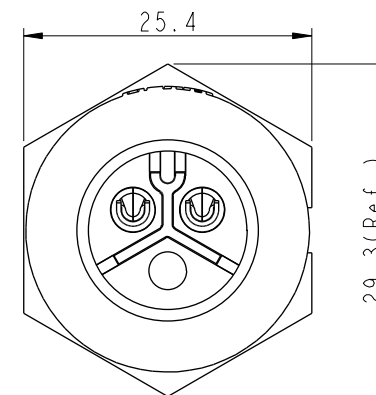


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2016/06/06	Tom_Gu	Change Rev.01 To Rev.A
B	C190470	2019/03/20	Vicky	Change Note

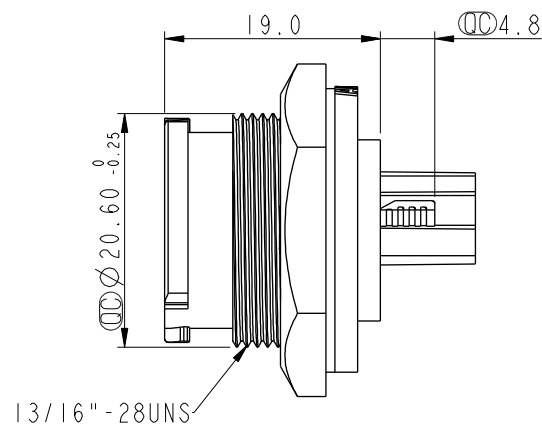


Pin Assignments

Front View



Recommended Panel Cut-Out

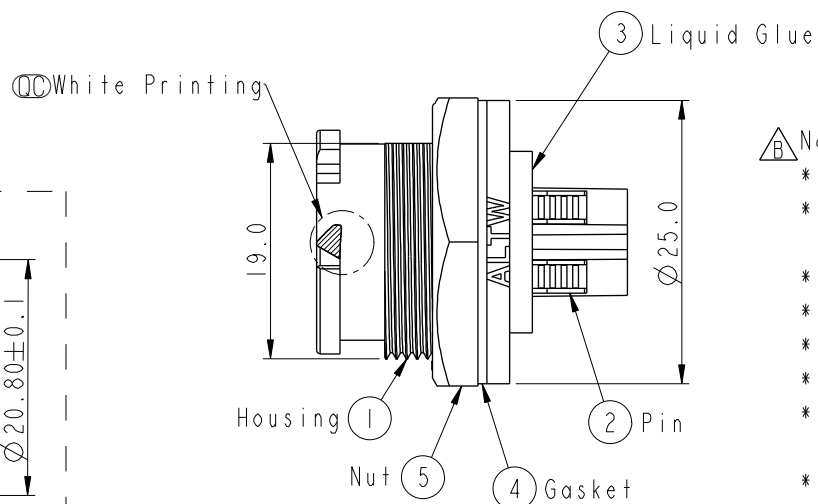

Δ_B Note:

- *  Important Dimension To Check.
- * Waterproof Rate: IP68, Unmated.
In 1 meter water within 24 hours
- * Housing: Thermoplastic, Black.
- * Pin: Copper Alloy, Gold Plated.
- * Nut: Thermoplastic, Black.
- * Gasket: Rubber , Gray.
- * Use Without Waterproof Cap
Panel Thickness Max: 4.2mm
- * Use With Waterproof Cap
Panel Thickness Max: 3.0mm
- * Gasket and Nut are packed separately
in PE bags.

UNIT : mm

TOLERANCE	
.X	± 0.25
.XX	± 0.1
.XXX	± 0.05
ANGLES	$\pm 1^{\circ}$

TITLE	X-Lok C Size Receptacle Front 2Pin 20A M Conn. F Pin
-------	---

SCALE 3:2	SIZE A4	SHEET 1 OF 1
REV. B	WC-REV. A.3	QC: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	CC-02PMFS-QC800P
---------	------------------

DWG NO
CC-02PMFS-QC800P

CUSTOMER	ALTW
----------	------

DRAWN BY	Vicky
----------	-------

CHECKED BY	Rita
------------	------

APPROVED BY	Md
-------------	----

DATE	2019-03-20
------	------------

DATE	2019-03-20
------	------------

DATE	2019-03-20
------	------------