

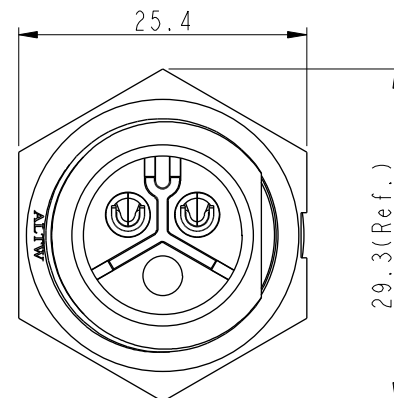
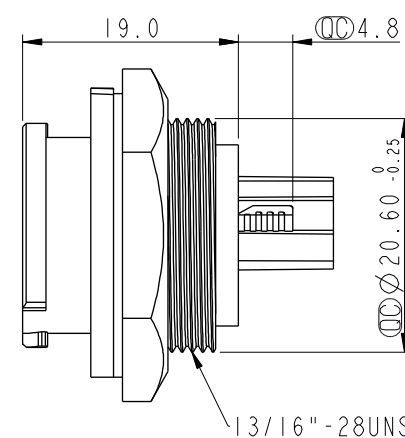



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2016/06/08	Tom_Gu	Change Rev.01 To Rev.A
B	CI90470	2019/03/20	Vicky	Change Note


ALTW
CONFIDENTIAL
2019-03-20
R&D DEPT.



Pin Assignments
Front View



Recommenderd Panel Cut-Out

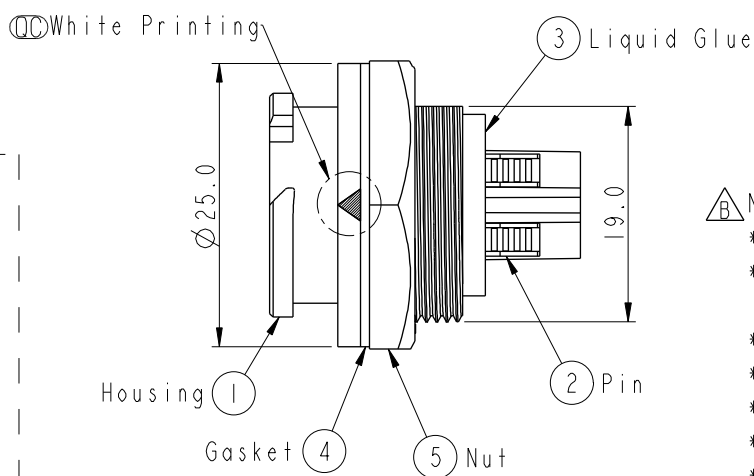

- Note:
- * Important Dimension To Check.
 - * Waterproof Rate: IP68, Unmated.
In 1 meter water within 24 hours
 - * Housing: Thermoplastic, Black.
 - * Pin: Copper Alloy, Gold Plated.
 - * Nut: Thermoplastic, Black.
 - * Gasket: Rubber, Gray.
 - * Panel Thickness Max: 4.2mm
 - * Gasket and Nut are packed separately in PE bags.

UNIT:mm		TITLE		ITEM NO		DRAWN BY		DATE	
		X-Lok C Size Receptacle Rear 2Pin 20A M Conn. F Pin		CC-02RMFS-QC800P		Vicky		2019-03-20	
TOLERANCE		SCALE		DWG NO		CHECKED BY		DATE	
.X ±0.25		3:2		CC-02RMFS-QC800P		Rita		2019-03-20	
.XX ±0.1		SIZE		CUSTOMER		APPROVED BY		DATE	
.XXX ±0.05		A4		ALTW		Max		2019-03-20	
ANGLES ±1°		REV.							
		B							
		WC-REV.							
		A.2							
		Inspection item							

Amphenol LTW
安費諾亮泰企業股份有限公司