
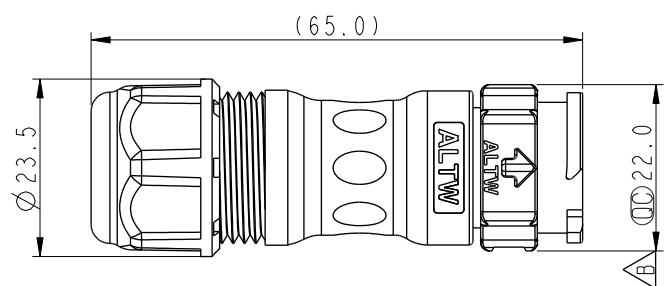


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	E191899	2019/11/13	Ruru	X4
C	C231238	2023/09/20	Vicky	X1

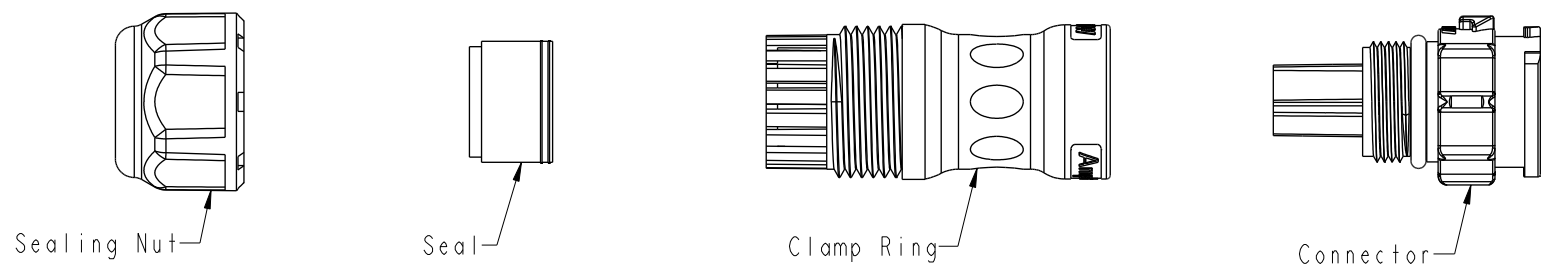

CC-XXBMFA-QL8XNP

02-2 Pin
03-3 Pin

S: With Red Color Seal 1, Cable OD 6.0~8.0mm.
M: With Yellow Color Seal 2, Cable OD 8.0~10.0mm.
L: With Blue Color Seal 3, Cable OD 10.0~12.0mm.
A: With Seal 1 & Seal 2 & Seal 3.

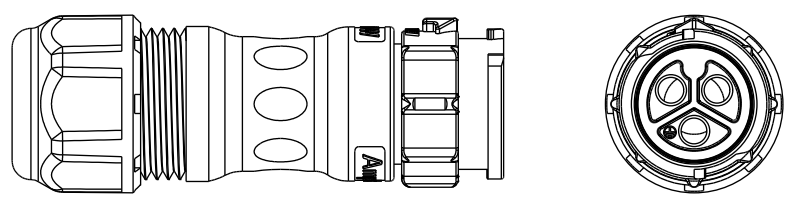

Pin
Assignments
Front View



2 Pin



3 Pin

- Note:
- * Important Dimension
 - * Waterproof Rate: IP68, Mated
IP68 : 1M Depth Of Water In 24hours
 - * Housing: Thermoplastic, Black
 - * Clamp Ring: Thermoplastic, Black
 - * Sealing Nut: Thermoplastic, Black
 - * Seals: Rubber
- * One set unassembled in one pe bag

UNIT:mm		TITLE XLOK, C-20A, CABLE W/O SR M, F, FI CRIMP, XLOK	
TOLERANCE		SCALE 1:1	SIZE A4
±0.5 mm		REV. C	WC-REV. A.1
			: Inspection item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY Ruru	DATE 2019-11-13
DWG NO CC-XXBMFA-QL8XNP	CHECKED BY Rita	DATE 2019-11-13
CUSTOMER ALTW	APPROVED BY Max	DATE 2019-11-13