




THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1410084	2014/01/21	Vicky	Modify Dimension

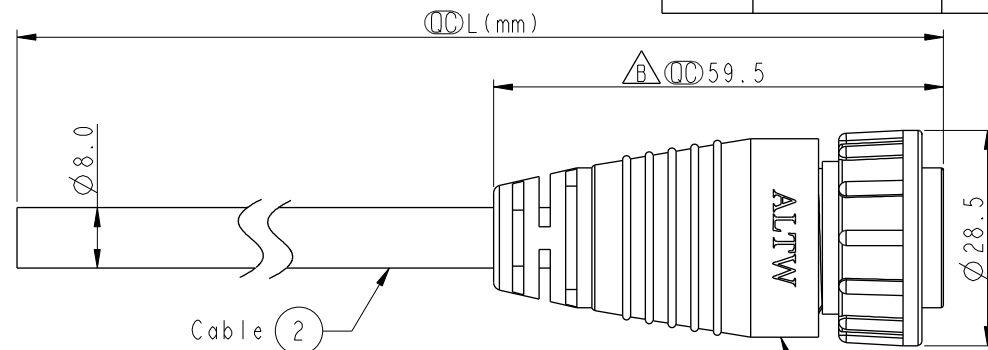

Conn.



18	Blue/White	藍/白
17	Green/White	綠/白
16	Orange/White	橘/白
15	Red/White	紅/白
14	Brown/White	棕/白
13	Black/White	黑/白
12	Light Green	淺綠
11	Purple	紫
10	Orange	橘
9	Black	黑
8	Red	紅
7	Pink	粉紅
6	Gray	灰
5	Yellow	黃
4	Green	綠
3	White	白
2	Blue	藍
1	Brown	棕
Conn.	Wire Color	
Pin Out		




IDD-18AFMM-LL7AXX

XX : 01~99Meters
01 : 01Meter
02 : 02Meters
:
99 : 99Meters

Cable Length(L): 01~99Meters

- Note:
- * $\varnothing$ Important Dimension To Check.
 - * Waterproof Rate: IP67
 - * Housing: Nylon+GF, Black.
 - * Male Pin: Copper Alloy, Gold Plated.
 - * Lock Nut: Nylon+GF, Black.
 - * O-Ring: Silicone, Gray.
 - * Cable: UL2464 24AWG*18C+D+AL/My, PVC Jacket, UV Resistant, OD=8.0mm, Black.
 - * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

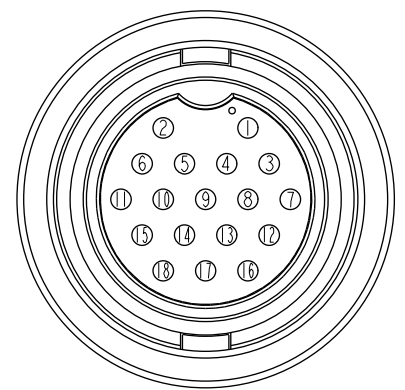

Pin Assignments
Front View

UNIT:mm		TOLERANCE		TITLE		Amphenol LTW		ITEM NO		DRAWN BY		DATE	
±0.5 mm		SCALE		Large CNC Pin		安費諾亮泰企業股份有限公司		Dwg NO		Vicky		2014-01-21	
		REV.		Cable Lock 18Pin F Conn M Pin				IDD-18AFMM-LL7AXX		Ruru		2014-01-21	
		WC-REV.		SHEET				CUSTOMER		Victor		2014-01-21	
		B.1		OF				ALTW					
				QC: Inspection item									