




THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.


REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN1410086	2014-01-21	Vicky	Modify Dimension

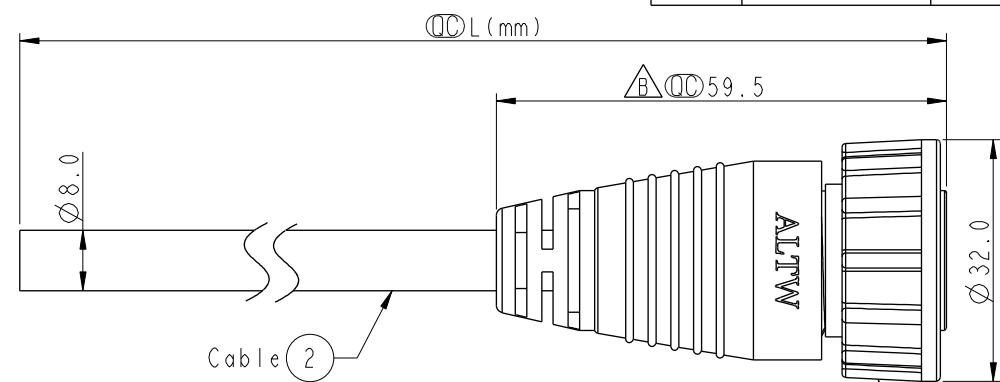


Conn.



18	Blue/White	藍/白
17	Green/White	綠/白
16	Orange/White	橘/白
15	Red/White	紅/白
14	Brown/White	棕/白
13	Black/White	黑/白
12	Light Green	淺綠
11	Purple	紫
10	Orange	橘
9	Black	黑
8	Red	紅
7	Pink	粉紅
6	Gray	灰
5	Yellow	黃
4	Green	綠
3	White	白
2	Blue	藍
1	Brown	棕
Conn.	Wire Color	
Pin Out		

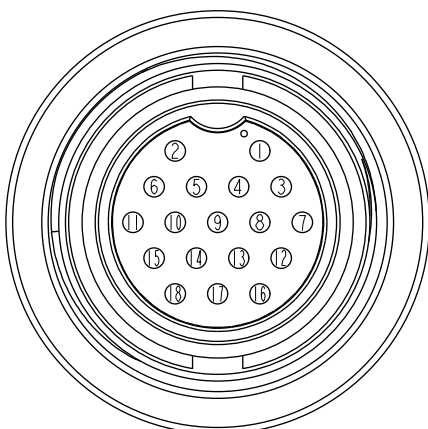

Pin Assignments
Front View



IDD-18AFMM-SL7AXX

XX :01~99Meters
01 :01Meter
02 :02Meters
:
99 :99Meters

Cable Length(L):01~99Meters

Note:

- * $\varnothing$ Important Dimension To Check.
- * Waterproof Rate: IP67
- * Housing: Nylon+GF, Black.
- * Male Pin: Copper Alloy, Gold Plated.
- * Screw Nut: Nylon+GF, Black.
- * O-Ring: Silicone, Gray.
- * Cable: UL2464 24AWG*18C+D+AL/My, PVC Jacket, UV Resistant, OD=8.0mm, Black.
- * Cable Length Tolerance: 01M:±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

UNIT:mm TOLERANCE ±0.5 mm	TITLE Large CNC Pin Cable Screw 18Pin F Conn M Pin			Amphenol LTW 安費諾亮泰企業股份有限公司		ITEM NO	DRAWN BY Vicky	DATE 2014-01-21
	SCALE 1:1	SIZE A4	SHEET 1 OF 1			DWG NO IDD-18AFMM-SL7AXX	CHECKED BY Ruru	DATE 2014-01-21
	REV. B	WC-REV. B.1	QC: Inspection item			CUSTOMER ALTW	APPROVED BY Victor	DATE 2014-01-21