


Cable Length(L): 01~99Meters

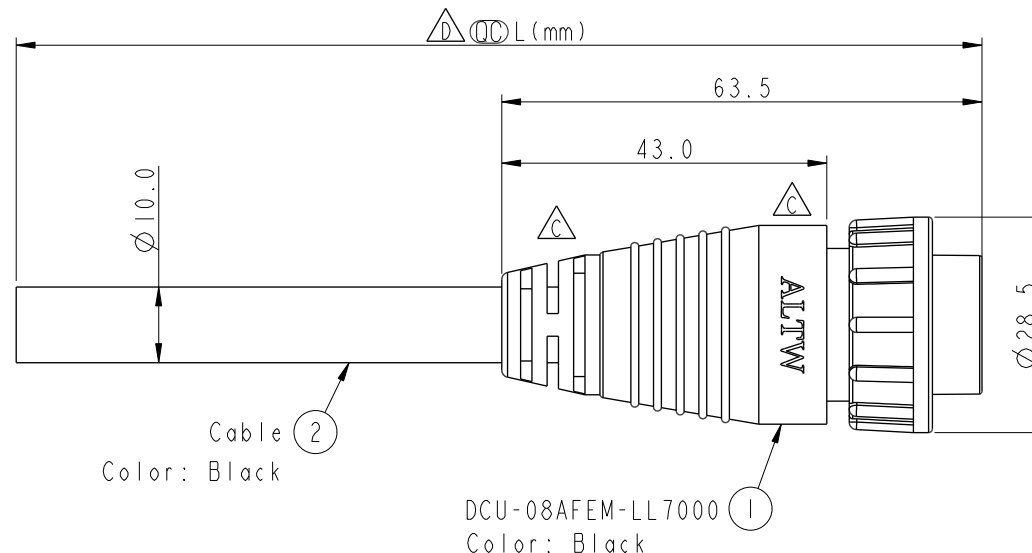

8	Brown	16AWG	棕
7	Green/Yellow	16AWG	綠 / 黃
6	Blue	16AWG	藍
5	Red	24AWG	紅
4	Green	24AWG	綠
3	White	24AWG	白
2	Blue	24AWG	藍
1	Drain		地線
Conn.	Wire Color		
	Pin Out		

- *  Important Dimension To Check
- * Waterproof Rate: IP67
- * Connector: Nylon+GF, Black
- * Pin: Copper Alloy, Gold Plated
- * O-Ring: Silicone, Gray
- * Lock Nut: Nylon+GF, Black
- * Cable: UL2586 (24#*IP+A)*2C+16#*3C+Drain+Al/Mylar,
PVC Jacket, UV Resistant, OD=Ø10.0mm, Black
- * Cable Length Tolerance : 01M±40mm
02M~05M:±60mm
06M~10M:±100mm
11M~30M:±200mm
31M~99M:±500mm

UNIT: mm		TITLE O CERES, D-20A+2A, 08P, CABLE W/SR F, M PWR+F SIG, MOLDING, 2LOCK			Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO	DRAWN BY Ruru	DATE 2024-07-15
TOLERANCE	± 0.5 mm	SCALE 1:1	SIZE A4	SHEET 1 OF 1		DWG NO DCU-08AFEM-LL7BXX	CHECKED BY Rita	DATE 2024-07-15
		REV. E	WC-REV. C.2	QC: Inspection item		CUSTOMER ALTW	APPROVED BY Fred	DATE 2024-07-15